



US008360599B2

(12) **United States Patent**  
**Ivey et al.**

(10) **Patent No.:** **US 8,360,599 B2**  
(45) **Date of Patent:** **Jan. 29, 2013**

(54) **ELECTRIC SHOCK RESISTANT L.E.D. BASED LIGHT**

3,561,719 A	2/1971	Grindle
3,586,936 A	6/1971	McLeroy
3,601,621 A	8/1971	Ritchie
3,612,855 A	10/1971	Juhnke
3,643,088 A	2/1972	Osteen et al.
3,746,918 A	7/1973	Drucker et al.
3,818,216 A	6/1974	Larraburu
3,832,503 A	8/1974	Crane

(75) Inventors: **John Ivey**, Farmington Hills, MI (US);  
**Dennis Siemiet**, Rochester Hills, MI (US)

(73) Assignee: **ilumisys, Inc.**, Troy, MI (US)

(Continued)

(\*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 102 days.

**FOREIGN PATENT DOCUMENTS**

CN	1584388 A	2/2005
CN	2766345 Y	3/2006

(Continued)

(21) Appl. No.: **12/126,579**

(22) Filed: **May 23, 2008**

**OTHER PUBLICATIONS**

(65) **Prior Publication Data**

US 2009/0290334 A1 Nov. 26, 2009

Written Opinion and International Search Report of the International Search Authority Jan. 4, 2010 from the corresponding International Application No. PCT/US2009/044313 filed May 18, 2009.

(Continued)

(51) **Int. Cl.**  
**F21V 7/20** (2006.01)  
**F21V 29/00** (2006.01)  
**F21S 4/00** (2006.01)

*Primary Examiner* — David Crowe  
(74) *Attorney, Agent, or Firm* — Young Basile

(52) **U.S. Cl.** ..... **362/218**; 362/223; 362/225

(58) **Field of Classification Search** ..... 362/218,  
362/221, 222, 223, 225, 217.1, 240, 249.02,  
362/249.06

(57) **ABSTRACT**

See application file for complete search history.


A LED-based replacement light for a fluorescent socket is constructed such that an entirety of a radially outer portion of a tubular housing at least partially defined by a high-dielectric light transmitting portion is formed of a high-dielectric material. Forming a radially outer portion of the tubular housing of a high-dielectric material prevents a person handling the light from being shocked as a result of capacitive coupling occurring when the LED-based replacement light is installed one end at a time. A circuit board is in thermally conductive relation with the tubular housing, allowing for conduction of heat generated by the LEDs from a side of circuit board opposite the LEDs to the tubular housing for dissipation to the ambient environment.

(56) **References Cited**

**U.S. PATENT DOCUMENTS**

54,511 A	2/1920	Owen
58,105 A	6/1921	Poritz
79,817 A	8/1929	Hoch
80,419 A	1/1930	Kramer
84,763 A	7/1931	Stange
D119,797 S	4/1940	Winkler et al.
D125,312 S	2/1941	Logan
2,909,097 A	10/1959	Alden et al.
3,318,185 A	5/1967	Kott

**10 Claims, 5 Drawing Sheets**

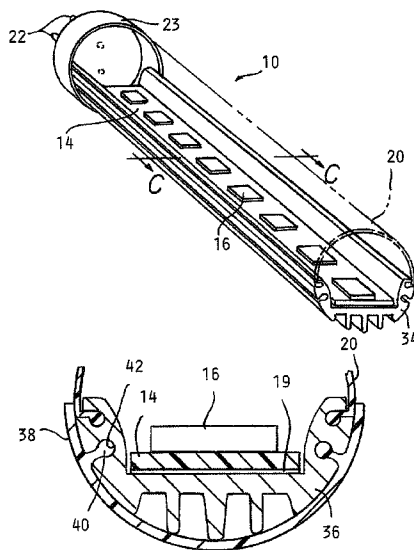

U.S. PATENT DOCUMENTS					
3,858,086 A	12/1974	Anderson et al.	4,922,154 A	5/1990	Cacoub
3,909,670 A	9/1975	Wakamatsu et al.	4,934,852 A	6/1990	Havel
3,924,120 A	12/1975	Cox, III	4,941,072 A	7/1990	Yasumoto et al.
3,958,885 A	5/1976	Stockinger et al.	4,943,900 A	7/1990	Gartner
3,974,637 A	8/1976	Bergey et al.	4,962,687 A	10/1990	Belliveau et al.
3,993,386 A	11/1976	Rowe	4,965,561 A	10/1990	Havel
4,001,571 A	1/1977	Martin	4,973,835 A	11/1990	Kurosu et al.
4,054,814 A	10/1977	Fegley et al.	4,979,081 A	12/1990	Leach et al.
4,070,568 A	1/1978	Gala	4,980,806 A	12/1990	Taylor et al.
4,082,395 A	4/1978	Donato et al.	4,992,704 A	2/1991	Stinson
4,096,349 A	6/1978	Donato	5,003,227 A	3/1991	Nilssen
4,102,558 A	7/1978	Krachman	5,008,595 A	4/1991	Kazar
4,107,581 A	8/1978	Abernethy	5,008,788 A	4/1991	Palinkas
4,189,663 A	2/1980	Schmutzer et al.	5,010,459 A	4/1991	Taylor et al.
4,211,955 A	7/1980	Ray	5,018,054 A	5/1991	Ohashi et al.
4,241,295 A	12/1980	Williams, Jr.	5,027,037 A	6/1991	Wei
4,271,408 A	6/1981	Teshima et al.	5,027,262 A	6/1991	Freed
4,272,689 A	6/1981	Crosby et al.	5,032,960 A	7/1991	Katoh
4,273,999 A	6/1981	Pierpoint	5,034,807 A	7/1991	Von Kohorn
4,298,869 A	11/1981	Okuno	5,036,248 A	7/1991	McEwan et al.
4,329,625 A	5/1982	Nishizawa et al.	5,038,255 A	8/1991	Nishihashi et al.
4,339,788 A	7/1982	White et al.	5,065,226 A	11/1991	Kluitmans et al.
4,342,947 A	8/1982	Bloyd	5,072,216 A	12/1991	Grange
4,367,464 A	1/1983	Kurahashi et al.	5,078,039 A	1/1992	Tulk et al.
D268,134 S	3/1983	Zurcher	5,083,063 A	1/1992	Brooks
4,382,272 A	5/1983	Quella et al.	5,088,013 A	2/1992	Revis
4,388,567 A	6/1983	Yamazaki et al.	5,089,748 A	2/1992	Ihms
4,388,589 A	6/1983	Molldrem, Jr.	5,103,382 A	4/1992	Kondo et al.
4,392,187 A	7/1983	Bornhorst	5,122,733 A	6/1992	Havel
4,394,719 A	7/1983	Moberg	5,126,634 A	6/1992	Johnson
4,420,711 A	12/1983	Takahashi et al.	5,128,595 A	7/1992	Hara
4,455,562 A	6/1984	Dolan et al.	5,130,909 A	7/1992	Gross
4,500,796 A	2/1985	Quin	5,134,387 A	7/1992	Smith et al.
4,581,687 A	4/1986	Nakanishi	5,140,220 A	8/1992	Hasegawa
4,597,033 A	6/1986	Meggs et al.	5,142,199 A	8/1992	Elwell
4,600,972 A	7/1986	MacIntyre	5,151,679 A	9/1992	Dimmick
4,607,317 A	8/1986	Lin	5,154,641 A	10/1992	McLaughlin
4,622,881 A	11/1986	Rand	5,161,879 A	11/1992	McDermott
4,625,152 A	11/1986	Nakai	5,161,882 A	11/1992	Garrett
4,635,052 A	1/1987	Aoike et al.	5,164,715 A	11/1992	Kashiwabara et al.
4,647,217 A	3/1987	Havel	5,184,114 A	2/1993	Brown
4,656,398 A	4/1987	Michael et al.	5,194,854 A	3/1993	Havel
4,661,890 A	4/1987	Watanabe et al.	5,198,756 A	3/1993	Jenkins et al.
4,668,895 A	5/1987	Schneider	5,209,560 A	5/1993	Taylor et al.
4,675,575 A	6/1987	Smith et al.	5,220,250 A	6/1993	Szuba
4,682,079 A	7/1987	Sanders et al.	5,225,765 A	7/1993	Callahan et al.
4,686,425 A	8/1987	Havel	5,226,723 A	7/1993	Chen
4,687,340 A	8/1987	Havel	5,254,910 A	10/1993	Yang
4,688,154 A	8/1987	Nilssen	5,256,948 A	10/1993	Boldin et al.
4,688,869 A	8/1987	Kelly	5,278,542 A	1/1994	Smith et al.
4,695,769 A	9/1987	Schweickardt	5,282,121 A	1/1994	Bornhorst et al.
4,698,730 A	10/1987	Sakai et al.	5,283,517 A	2/1994	Havel
4,701,669 A	10/1987	Head et al.	5,287,352 A	2/1994	Jackson et al.
4,705,406 A	11/1987	Havel	5,294,865 A	3/1994	Haraden
4,707,141 A	11/1987	Havel	5,298,871 A	3/1994	Shimohara
D293,723 S	1/1988	Buttner	5,301,090 A	4/1994	Hed
4,727,289 A	2/1988	Uchida	5,303,124 A	4/1994	Wrobel
4,740,882 A	4/1988	Miller	5,307,295 A	4/1994	Taylor et al.
4,748,545 A	5/1988	Schmitt	5,321,593 A	6/1994	Moates
4,753,148 A	6/1988	Johnson	5,323,226 A	6/1994	Schreder
4,758,173 A	7/1988	Northrop	5,329,431 A	7/1994	Taylor et al.
4,771,274 A	9/1988	Havel	5,344,068 A	9/1994	Haessig
4,780,621 A	10/1988	Bartleucci et al.	5,350,977 A	9/1994	Hamamoto et al.
4,794,383 A	12/1988	Havel	5,357,170 A	10/1994	Luchaco et al.
4,818,072 A	4/1989	Mohebban	5,371,618 A	12/1994	Tai et al.
4,824,269 A	4/1989	Havel	5,374,876 A	12/1994	Horibata et al.
4,837,565 A	6/1989	White	5,375,043 A	12/1994	Tokunaga
4,843,627 A	6/1989	Stebbins	D354,360 S	1/1995	Murata
4,845,481 A	7/1989	Havel	5,381,074 A	1/1995	Rudzewicz et al.
4,845,745 A	7/1989	Havel	5,388,357 A	2/1995	Malita
4,857,801 A	8/1989	Farrell	5,402,702 A	4/1995	Hata
4,863,223 A	9/1989	Weissenbach et al.	5,404,282 A	4/1995	Klinke et al.
4,870,325 A	9/1989	Kazar	5,406,176 A	4/1995	Sugden
4,874,320 A	10/1989	Freed et al.	5,410,328 A	4/1995	Yoksza et al.
4,887,074 A	12/1989	Simon et al.	5,412,284 A	5/1995	Moore et al.
4,894,832 A	1/1990	Colak	5,412,552 A	5/1995	Fernandes
4,901,207 A	2/1990	Sato et al.	5,420,482 A	5/1995	Phares
4,912,371 A	3/1990	Hamilton	5,421,059 A	6/1995	Leffers, Jr.
			5,430,356 A	7/1995	Ference et al.

5,432,408 A	7/1995	Matsuda et al.	5,859,508 A	1/1999	Ge et al.
5,436,535 A	7/1995	Yang	5,865,529 A	2/1999	Yan
5,436,853 A	7/1995	Shimohara	5,890,794 A	4/1999	Abtahi et al.
5,450,301 A	9/1995	Waltz et al.	5,896,010 A	4/1999	Mikolajczak et al.
5,461,188 A	10/1995	Drago et al.	5,907,742 A	5/1999	Johnson et al.
5,463,280 A	10/1995	Johnson	5,912,653 A	6/1999	Fitch
5,465,144 A	11/1995	Parker et al.	5,921,660 A	7/1999	Yu
5,475,300 A	12/1995	Havel	5,924,784 A	7/1999	Chliwnyj et al.
5,489,827 A	2/1996	Xia	5,927,845 A	7/1999	Gustafson et al.
5,491,402 A	2/1996	Small	5,934,792 A	8/1999	Camarota
5,493,183 A	2/1996	Kimball	5,946,209 A	8/1999	Eckel et al.
5,504,395 A	4/1996	Johnson et al.	5,949,347 A	9/1999	Wu
5,506,760 A	4/1996	Giebler et al.	5,952,680 A	9/1999	Strite
5,513,082 A	4/1996	Asano	5,959,547 A	9/1999	Tubel et al.
5,519,496 A	5/1996	Borgert et al.	5,962,989 A	10/1999	Baker
5,530,322 A	6/1996	Ference et al.	5,962,992 A	10/1999	Huang et al.
5,544,809 A	8/1996	Keating et al.	5,963,185 A	10/1999	Havel
5,545,950 A	8/1996	Cho	5,974,553 A	10/1999	Gandar
5,550,440 A	8/1996	Allison et al.	5,980,064 A	11/1999	Metroyanis
5,559,681 A	9/1996	Duarte	5,998,925 A	12/1999	Shimizu et al.
5,561,346 A	10/1996	Byrne	5,998,928 A	12/1999	Hipp
D376,030 S	11/1996	Cohen	6,007,209 A	12/1999	Pelka
5,575,459 A	11/1996	Anderson	6,008,783 A	12/1999	Kitagawa et al.
5,575,554 A	11/1996	Guritz	6,011,691 A	1/2000	Schreffler
5,581,158 A	12/1996	Quazi	6,016,038 A	1/2000	Mueller et al.
5,592,051 A	1/1997	Korkala	6,018,237 A	1/2000	Havel
5,600,199 A	2/1997	Martin, Sr. et al.	6,019,493 A	2/2000	Kuo et al.
5,607,227 A	3/1997	Yasumoto et al.	6,020,825 A	2/2000	Chansky et al.
5,608,290 A	3/1997	Hutchisson et al.	6,025,550 A	2/2000	Kato
5,614,788 A	3/1997	Mullins et al.	6,028,694 A	2/2000	Schmidt
5,621,282 A	4/1997	Haskell	6,030,099 A	2/2000	McDermott
5,621,603 A	4/1997	Adamec et al.	6,031,343 A	2/2000	Recknagel et al.
5,621,662 A	4/1997	Humphries et al.	D422,737 S	4/2000	Orozco
5,622,423 A	4/1997	Lee	6,056,420 A	5/2000	Wilson et al.
5,633,629 A	5/1997	Hochstein	6,068,383 A	5/2000	Robertson et al.
5,634,711 A	6/1997	Kennedy et al.	6,069,597 A	5/2000	Hansen
5,640,061 A	6/1997	Bornhorst et al.	6,072,280 A	6/2000	Allen
5,640,141 A	6/1997	Myllymaki	6,084,359 A	7/2000	Hetzel et al.
5,642,129 A	6/1997	Zavracky et al.	6,086,220 A	7/2000	Lash et al.
5,655,830 A	8/1997	Ruskouski	6,091,200 A	7/2000	Lenz
5,656,935 A	8/1997	Havel	6,092,915 A	7/2000	Rensch
5,661,645 A	8/1997	Hochstein	6,095,661 A	8/2000	Lebens et al.
5,673,059 A	9/1997	Zavracky et al.	6,097,352 A	8/2000	Zavracky et al.
5,682,103 A	10/1997	Burrell	6,116,748 A	9/2000	George
5,688,042 A	11/1997	Madadi et al.	6,121,875 A	9/2000	Hamm et al.
5,697,695 A	12/1997	Lin et al.	6,127,783 A	10/2000	Pashley et al.
5,701,058 A	12/1997	Roth	6,132,072 A	10/2000	Turnbull et al.
5,712,650 A	1/1998	Barlow	6,135,604 A	10/2000	Lin
5,721,471 A	2/1998	Begemann et al.	6,139,174 A	10/2000	Butterworth
5,725,148 A	3/1998	Hartman	6,149,283 A	11/2000	Conway et al.
5,726,535 A	3/1998	Yan	6,150,774 A	11/2000	Mueller et al.
5,731,759 A	3/1998	Finucan	6,151,529 A	11/2000	Batko
5,734,590 A	3/1998	Tebbe	6,158,882 A	12/2000	Bischoff, Jr.
5,751,118 A	5/1998	Mortimer	6,166,496 A	12/2000	Lys et al.
5,752,766 A	5/1998	Bailey et al.	6,175,201 B1	1/2001	Sid
5,765,940 A	6/1998	Levy et al.	6,175,220 B1	1/2001	Billig et al.
5,769,527 A	6/1998	Taylor et al.	6,181,126 B1	1/2001	Havel
5,784,006 A	7/1998	Hochstein	6,183,086 B1	2/2001	Neubert
5,785,227 A	7/1998	Akiba	6,183,104 B1	2/2001	Ferrara
5,790,329 A	8/1998	Klaus et al.	6,184,628 B1	2/2001	Ruthenberg
5,803,579 A	9/1998	Turnbull et al.	6,196,471 B1	3/2001	Ruthenberg
5,803,580 A	9/1998	Tseng	6,203,180 B1	3/2001	Fleischmann
5,803,729 A	9/1998	Tsimerman	6,211,626 B1	4/2001	Lys et al.
5,806,965 A	9/1998	Deese	6,215,409 B1	4/2001	Blach
5,808,689 A	9/1998	Small	6,217,190 B1	4/2001	Altman et al.
5,810,463 A	9/1998	Kawahara et al.	6,219,239 B1	4/2001	Mellberg et al.
5,812,105 A	9/1998	Van de Ven	6,227,679 B1	5/2001	Zhang et al.
5,813,751 A	9/1998	Shaffer	6,238,075 B1	5/2001	Dealey, Jr. et al.
5,813,753 A	9/1998	Vriens et al.	6,241,359 B1	6/2001	Lin
5,821,695 A	10/1998	Vilanilam et al.	6,250,774 B1	6/2001	Begemann et al.
5,825,051 A	10/1998	Bauer et al.	6,252,350 B1	6/2001	Alvarez
5,828,178 A	10/1998	York et al.	6,252,358 B1	6/2001	Xydis et al.
5,836,676 A	11/1998	Ando et al.	6,268,600 B1	7/2001	Nakamura et al.
5,848,837 A	12/1998	Gustafson	6,273,338 B1	8/2001	White
5,850,126 A	12/1998	Kanbar	6,275,397 B1	8/2001	McClain
5,851,063 A	12/1998	Doughty et al.	6,283,612 B1	9/2001	Hunter
5,852,658 A	12/1998	Knight et al.	6,292,901 B1	9/2001	Lys et al.
5,854,542 A	12/1998	Forbes	6,293,684 B1	9/2001	Riblett
RE36,030 E	1/1999	Nadeau	6,297,724 B1	10/2001	Bryans et al.

6,305,109 B1 *	10/2001	Lee	40/546	6,700,136 B2	3/2004	Guida	
6,305,821 B1	10/2001	Hsieh et al.		6,712,486 B1	3/2004	Popovich et al.	
6,307,331 B1	10/2001	Bonasia et al.		6,717,376 B2	4/2004	Lys et al.	
6,310,590 B1	10/2001	Havel		6,717,526 B2	4/2004	Martineau et al.	
6,323,832 B1	11/2001	Nishizawa et al.		6,720,745 B2	4/2004	Lys et al.	
6,325,651 B1	12/2001	Nishihara et al.		6,726,348 B2	4/2004	Gloisten	
6,334,699 B1	1/2002	Gladnick		6,741,324 B1	5/2004	Kim	
6,340,868 B1	1/2002	Lys et al.		D491,678 S	6/2004	Piepgras	
6,354,714 B1	3/2002	Rhodes		D492,042 S	6/2004	Piepgras	
6,361,186 B1	3/2002	Slayden		6,744,223 B2	6/2004	Laflamme et al.	
6,369,525 B1	4/2002	Chang et al.		6,748,299 B1	6/2004	Motoyama	
6,371,637 B1	4/2002	Atchinson et al.		6,762,562 B2	7/2004	Leong	
6,379,022 B1	4/2002	Amerson et al.		6,774,584 B2	8/2004	Lys et al.	
D457,667 S	5/2002	Piepgras et al.		6,777,891 B2	8/2004	Lys et al.	
D457,669 S	5/2002	Piepgras et al.		6,781,329 B2	8/2004	Mueller et al.	
D457,974 S	5/2002	Piepgras et al.		6,787,999 B2	9/2004	Stimac et al.	
6,388,393 B1	5/2002	Illingworth		6,788,000 B2	9/2004	Appelberg et al.	
6,394,623 B1	5/2002	Tsui		6,788,011 B2	9/2004	Mueller et al.	
D458,395 S	6/2002	Piepgras et al.		6,791,840 B2	9/2004	Chun	
6,400,096 B1	6/2002	Wells et al.		6,796,680 B1	9/2004	Showers et al.	
6,404,131 B1	6/2002	Kawano et al.		6,801,003 B2	10/2004	Schanberger et al.	
6,411,022 B1	6/2002	Machida		6,806,659 B1	10/2004	Mueller et al.	
6,422,716 B2	7/2002	Henrici et al.		6,814,470 B2	11/2004	Rizkin et al.	
6,428,189 B1	8/2002	Hochstein		6,815,724 B2	11/2004	Dry	
D463,610 S	9/2002	Piepgras et al.		6,846,094 B2	1/2005	Luk	
6,445,139 B1	9/2002	Marshall et al.		6,851,816 B2	2/2005	Wu et al.	
6,448,550 B1	9/2002	Nishimura		6,851,832 B2	2/2005	Tieszen	
6,448,716 B1	9/2002	Hutchison		6,853,151 B2	2/2005	Leong et al.	
6,459,919 B1	10/2002	Lys et al.		6,853,563 B1	2/2005	Yang et al.	
6,469,457 B2	10/2002	Callahan		6,857,924 B2	2/2005	Fu et al.	
6,471,388 B1	10/2002	Marsh		6,860,628 B2	3/2005	Robertson et al.	
6,472,823 B2 *	10/2002	Yen	315/112	6,866,401 B2	3/2005	Sommers et al.	
6,473,002 B1	10/2002	Hutchison		6,869,204 B2	3/2005	Morgan et al.	
D468,035 S	12/2002	Blanc et al.		6,871,981 B2	3/2005	Alexanderson et al.	
6,488,392 B1	12/2002	Lu		6,874,924 B1	4/2005	Hulse et al.	
6,495,964 B1	12/2002	Muthu et al.		6,879,883 B1	4/2005	Motoyama	
6,527,411 B1	3/2003	Sayers		6,882,111 B2 *	4/2005	Kan et al.	315/122
6,528,954 B1	3/2003	Lys et al.		6,883,929 B2	4/2005	Dowling	
6,528,958 B2	3/2003	Hulshof et al.		6,883,934 B2	4/2005	Kawakami et al.	
6,538,375 B1	3/2003	Duggal et al.		6,888,322 B2	5/2005	Dowling et al.	
6,548,967 B1	4/2003	Dowling et al.		6,897,624 B2	5/2005	Lys et al.	
6,573,536 B1	6/2003	Dry		6,909,239 B2	6/2005	Gauna	
6,577,072 B2	6/2003	Saito et al.		6,909,921 B1	6/2005	Bilger	
6,577,080 B2	6/2003	Lys et al.		6,918,680 B2	7/2005	Seeberger	
6,577,512 B2	6/2003	Tripathi et al.		6,921,181 B2	7/2005	Yen	
6,577,794 B1	6/2003	Currie et al.		6,936,968 B2	8/2005	Cross et al.	
6,578,979 B2	6/2003	Truttman-Battig		6,936,978 B2	8/2005	Morgan et al.	
6,582,103 B1	6/2003	Popovich et al.		6,940,230 B2	9/2005	Myron et al.	
6,583,550 B2	6/2003	Iwasa et al.		6,948,829 B2	9/2005	Verdes et al.	
6,583,573 B2	6/2003	Bierman		6,957,905 B1	10/2005	Pritchard et al.	
6,585,393 B1	7/2003	Brandes et al.		6,963,175 B2	11/2005	Archenhold et al.	
6,586,890 B2	7/2003	Min et al.		6,964,501 B2	11/2005	Ryan	
6,592,238 B2	7/2003	Cleaver et al.		6,965,197 B2	11/2005	Tyan et al.	
6,596,977 B2	7/2003	Muthu et al.		6,965,205 B2	11/2005	Piepgras et al.	
6,598,996 B1	7/2003	Lodhie		6,967,448 B2	11/2005	Morgan et al.	
6,608,453 B2	8/2003	Morgan et al.		6,969,179 B2	11/2005	Sloan et al.	
6,608,614 B1	8/2003	Johnson		6,969,186 B2	11/2005	Sonderegger et al.	
6,609,804 B2	8/2003	Nolan et al.		6,969,954 B2	11/2005	Lys	
6,612,712 B2	9/2003	Nepil		6,975,079 B2	12/2005	Lys et al.	
6,612,717 B2 *	9/2003	Yen	362/245	6,979,097 B2	12/2005	Elam et al.	
6,621,222 B1	9/2003	Hong		6,982,518 B2	1/2006	Chou et al.	
6,623,151 B2	9/2003	Pederson		6,995,681 B2	2/2006	Pederson	
6,624,597 B2	9/2003	Dowling et al.		6,997,576 B1	2/2006	Lodhie et al.	
D481,484 S	10/2003	Cuevas et al.		7,004,603 B2	2/2006	Knight	
6,634,770 B2	10/2003	Cao		D518,218 S	3/2006	Roberge et al.	
6,634,779 B2	10/2003	Reed		7,008,079 B2 *	3/2006	Smith	362/235
6,636,003 B2	10/2003	Rahm et al.		7,014,336 B1	3/2006	Ducharme et al.	
6,639,349 B1	10/2003	Bahadur		7,015,650 B2	3/2006	McGrath	
6,641,284 B2	11/2003	Stopa et al.		7,018,063 B2	3/2006	Michael et al.	
6,659,622 B2	12/2003	Katogi et al.		7,021,799 B2	4/2006	Mizuyoshi	
6,660,935 B2	12/2003	Southard et al.		7,021,809 B2	4/2006	Iwasa et al.	
6,666,689 B1	12/2003	Savage, Jr.		7,024,256 B2	4/2006	Krzyzanowski et al.	
6,667,623 B2	12/2003	Bourgault et al.		7,031,920 B2	4/2006	Dowling et al.	
6,674,096 B2	1/2004	Sommers		7,033,036 B2	4/2006	Pederson	
6,676,284 B1	1/2004	Wynne Willson		7,038,398 B1	5/2006	Lys et al.	
6,679,621 B2	1/2004	West et al.		7,038,399 B2	5/2006	Lys et al.	
6,681,154 B2	1/2004	Nierlich et al.		7,042,172 B2	5/2006	Dowling et al.	
6,682,205 B2	1/2004	Lin		7,048,423 B2	5/2006	Stepanenko et al.	
6,683,419 B2	1/2004	Kriparos		7,049,761 B2 *	5/2006	Timmermans et al.	315/246

7,052,171 B1 *	5/2006	Lefebvre et al. ....	362/649	7,241,038 B2	7/2007	Naniwa et al.	
7,053,557 B2	5/2006	Cross et al.		7,242,152 B2	7/2007	Dowling et al.	
7,064,498 B2	6/2006	Dowling et al.		7,246,926 B2	7/2007	Harwood	
7,064,674 B2	6/2006	Pederson		7,246,931 B2	7/2007	Hsieh et al.	
7,067,992 B2 *	6/2006	Leong et al. ....	315/291	7,248,239 B2	7/2007	Dowling et al.	
7,077,978 B2	7/2006	Setlur et al.		7,249,269 B1	7/2007	Motoyama	
7,080,927 B2	7/2006	Feuerborn et al.		7,249,865 B2	7/2007	Robertson	
7,086,747 B2	8/2006	Nielson et al.		D548,868 S	8/2007	Roberge et al.	
7,088,014 B2	8/2006	Nierlich et al.		7,252,408 B2	8/2007	Mazzochette et al.	
7,088,904 B2	8/2006	Ryan, Jr.		7,253,566 B2	8/2007	Lys et al.	
7,102,902 B1	9/2006	Brown et al.		7,255,457 B2	8/2007	Ducharme et al.	
7,113,541 B1	9/2006	Lys et al.		7,255,460 B2	8/2007	Lee	
7,114,830 B2	10/2006	Robertson et al.		7,256,554 B2	8/2007	Lys	
7,114,834 B2	10/2006	Rivas et al.		7,258,458 B2	8/2007	Mochiachvili et al.	
7,118,262 B2	10/2006	Negley		7,258,467 B2	8/2007	Saccomanno et al.	
7,119,503 B2	10/2006	Kemper		7,259,528 B2	8/2007	Pilz	
7,121,679 B2	10/2006	Fujimoto		7,262,439 B2	8/2007	Setlur et al.	
7,122,976 B1	10/2006	Null et al.		7,264,372 B2	9/2007	Maglica	
7,128,442 B2	10/2006	Lee et al.		7,267,467 B2	9/2007	Wu et al.	
7,128,454 B2	10/2006	Kim et al.		7,270,443 B2	9/2007	Kurtz et al.	
D532,532 S	11/2006	Maxik		7,271,794 B1	9/2007	Cheng et al.	
7,132,635 B2	11/2006	Dowling		7,273,300 B2	9/2007	Mrakovich	
7,132,785 B2	11/2006	Ducharme		7,274,045 B2	9/2007	Chandran et al.	
7,132,804 B2	11/2006	Lys et al.		7,274,160 B2	9/2007	Mueller et al.	
7,135,824 B2	11/2006	Lys et al.		D553,267 S	10/2007	Yuen	
7,139,617 B1	11/2006	Morgan et al.		7,285,801 B2	10/2007	Eliashevich et al.	
7,144,135 B2	12/2006	Martin et al.		7,288,902 B1	10/2007	Melanson	
7,153,002 B2	12/2006	Kim et al.		7,296,912 B2	11/2007	Beauchamp	
7,161,311 B2	1/2007	Mueller et al.		7,300,184 B2	11/2007	Ichikawa et al.	
7,161,313 B2	1/2007	Piepgas et al.		7,300,192 B2	11/2007	Mueller et al.	
7,161,556 B2	1/2007	Morgan et al.		D556,937 S	12/2007	Ly	
7,164,110 B2	1/2007	Pitigoi-Aron et al.		D557,854 S	12/2007	Lewis	
7,164,235 B2	1/2007	Ito et al.		7,303,300 B2	12/2007	Dowling et al.	
7,165,863 B1	1/2007	Thomas et al.		7,306,353 B2	12/2007	Popovich et al.	
7,165,866 B2	1/2007	Li		7,307,391 B2 *	12/2007	Shan .....	315/291
7,167,777 B2	1/2007	Budike, Jr.		7,308,296 B2	12/2007	Lys et al.	
7,168,843 B2	1/2007	Striebel		7,309,965 B2	12/2007	Dowling et al.	
D536,468 S	2/2007	Crosby		7,318,658 B2	1/2008	Wang et al.	
7,178,941 B2	2/2007	Roberge et al.		7,319,244 B2	1/2008	Liu et al.	
7,180,252 B2	2/2007	Lys et al.		7,319,246 B2	1/2008	Soules et al.	
D538,950 S	3/2007	Maxik		7,321,191 B2	1/2008	Setlur et al.	
D538,952 S	3/2007	Maxik et al.		7,326,964 B2	2/2008	Lim et al.	
D538,962 S	3/2007	Elliott		7,327,281 B2	2/2008	Hutchison	
7,186,003 B2	3/2007	Dowling et al.		7,329,031 B2	2/2008	Liaw et al.	
7,186,005 B2	3/2007	Hulse		D563,589 S	3/2008	Hariri et al.	
7,187,141 B2	3/2007	Mueller et al.		7,345,320 B2 *	3/2008	Dahm .....	257/99
7,190,126 B1	3/2007	Paton		7,348,604 B2	3/2008	Matheson	
7,192,154 B2	3/2007	Becker		7,350,936 B2	4/2008	Ducharme et al.	
7,198,387 B1	4/2007	Gloisten et al.		7,350,952 B2	4/2008	Nishigaki	
7,201,491 B2	4/2007	Bayat et al.		7,352,138 B2	4/2008	Lys et al.	
7,201,497 B2	4/2007	Weaver, Jr. et al.		7,352,339 B2	4/2008	Morgan et al.	
7,202,613 B2	4/2007	Morgan et al.		7,353,071 B2	4/2008	Blackwell et al.	
7,204,615 B2	4/2007	Arik et al.		7,358,679 B2	4/2008	Lys et al.	
7,204,622 B2	4/2007	Dowling et al.		7,358,929 B2	4/2008	Mueller et al.	
7,207,696 B1	4/2007	Lin		7,374,327 B2	5/2008	Schexnaider	
7,210,818 B2	5/2007	Luk et al.		7,385,359 B2	6/2008	Dowling et al.	
7,210,957 B2	5/2007	Mrakovich		7,391,159 B2	6/2008	Harwood	
7,211,959 B1	5/2007	Chou		7,396,146 B2	7/2008	Wang	
7,213,934 B2	5/2007	Zarian et al.		7,401,935 B2	7/2008	VanderSchuit	
7,217,004 B2	5/2007	Park et al.		7,401,945 B2	7/2008	Zhang	
7,217,012 B2	5/2007	Southard et al.		7,427,840 B2	9/2008	Morgan et al.	
7,217,022 B2	5/2007	Ruffin		7,429,117 B2	9/2008	Pohlert et al.	
7,218,056 B1	5/2007	Harwood		7,434,964 B1	10/2008	Zheng et al.	
7,218,238 B2	5/2007	Right et al.		7,438,441 B2	10/2008	Sun et al.	
7,220,015 B2	5/2007	Dowling		D580,089 S	11/2008	Ly et al.	
7,220,018 B2	5/2007	Crabb et al.		D581,556 S	11/2008	To et al.	
7,221,104 B2	5/2007	Lys et al.		7,449,847 B2	11/2008	Schanberger et al.	
7,221,110 B2	5/2007	Sears et al.		D582,577 S	12/2008	Yuen	
7,224,000 B2	5/2007	Aanegola et al.		7,476,002 B2	1/2009	Wolf et al.	
7,226,189 B2	6/2007	Lee et al.		7,476,004 B2 *	1/2009	Chan .....	362/240
7,228,052 B1	6/2007	Lin		7,478,924 B2	1/2009	Robertson	
7,228,190 B2	6/2007	Dowling et al.		7,490,957 B2	2/2009	Leong et al.	
7,231,060 B2	6/2007	Dowling et al.		7,497,596 B2	3/2009	Ge	
7,233,115 B2	6/2007	Lys		7,507,001 B2	3/2009	Kit	
7,233,831 B2	6/2007	Blackwell		7,510,299 B2	3/2009	Timmermans et al.	
7,236,366 B2	6/2007	Chen		7,520,635 B2	4/2009	Wolf et al.	
7,237,924 B2	7/2007	Martineau et al.		7,521,872 B2	4/2009	Bruning	
7,237,925 B2	7/2007	Mayer et al.		7,524,089 B2	4/2009	Park	
7,239,532 B1	7/2007	Hsu et al.		7,534,002 B2	5/2009	Yamaguchi et al.	

7,549,769	B2	6/2009	Kim et al.		2004/0212320	A1	10/2004	Dowling et al.
7,556,396	B2 *	7/2009	Kuo et al. ....	362/217.01	2004/0212321	A1	10/2004	Lys et al.
7,572,030	B2	8/2009	Booth et al.		2004/0212993	A1	10/2004	Morgan et al.
7,575,339	B2	8/2009	Hung		2004/0223328	A1	11/2004	Lee et al.
7,602,559	B2	10/2009	Jang et al.		2004/0240890	A1	12/2004	Lys et al.
7,619,366	B2	11/2009	Diederiks		2004/0257007	A1	12/2004	Lys et al.
7,635,201	B2 *	12/2009	Deng .....	362/249.02	2005/0013133	A1	1/2005	Yeh
D612,528	S	3/2010	McGrath et al.		2005/0024877	A1	2/2005	Frederick
7,690,813	B2	4/2010	Kanamori et al.		2005/0030744	A1	2/2005	Ducharme et al.
6,590,343	B2	9/2010	Pederson		2005/0035728	A1	2/2005	Schanberger et al.
2001/0033488	A1	10/2001	Chliwnyj et al.		2005/0036300	A1	2/2005	Dowling et al.
2001/0045803	A1	11/2001	Cencur		2005/0040774	A1	2/2005	Mueller et al.
2002/0038157	A1	3/2002	Dowling et al.		2005/0041161	A1	2/2005	Dowling et al.
2002/0044066	A1	4/2002	Dowling et al.		2005/0041424	A1	2/2005	Ducharme
2002/0047569	A1	4/2002	Dowling et al.		2005/0043907	A1	2/2005	Eckel et al.
2002/0047624	A1	4/2002	Stam et al.		2005/0044617	A1	3/2005	Mueller et al.
2002/0047628	A1	4/2002	Morgan et al.		2005/0047132	A1	3/2005	Dowling et al.
2002/0048169	A1	4/2002	Dowling et al.		2005/0047134	A1	3/2005	Mueller et al.
2002/0057061	A1	5/2002	Mueller et al.		2005/0062440	A1	3/2005	Lys et al.
2002/0060526	A1	5/2002	Timmermans et al.		2005/0063194	A1	3/2005	Lys et al.
2002/0070688	A1	6/2002	Dowling et al.		2005/0078477	A1	4/2005	Lo
2002/0074559	A1	6/2002	Dowling et al.		2005/0099824	A1	5/2005	Dowling et al.
2002/0078221	A1	6/2002	Blackwell et al.		2005/0107694	A1	5/2005	Jansen et al.
2002/0101197	A1	8/2002	Lys et al.		2005/0110384	A1	5/2005	Peterson
2002/0113555	A1	8/2002	Lys et al.		2005/0116667	A1	6/2005	Mueller et al.
2002/0130627	A1	9/2002	Morgan et al.		2005/0128751	A1	6/2005	Roberge et al.
2002/0145394	A1	10/2002	Morgan et al.		2005/0141225	A1	6/2005	Striebel
2002/0145869	A1	10/2002	Dowling		2005/0151489	A1	7/2005	Lys et al.
2002/0152045	A1	10/2002	Dowling et al.		2005/0151663	A1	7/2005	Tanguay
2002/0152298	A1	10/2002	Kikta et al.		2005/0154494	A1	7/2005	Ahmed
2002/0153851	A1	10/2002	Morgan et al.		2005/0174473	A1	8/2005	Morgan et al.
2002/0158583	A1	10/2002	Lys et al.		2005/0174780	A1	8/2005	Park
2002/0163316	A1	11/2002	Lys et al.		2005/0184667	A1	8/2005	Sturman et al.
2002/0171365	A1	11/2002	Morgan et al.		2005/0201112	A1	9/2005	Machi et al.
2002/0171377	A1	11/2002	Mueller et al.		2005/0206529	A1	9/2005	St.-Germain
2002/0171378	A1	11/2002	Morgan et al.		2005/0213320	A1	9/2005	Kazuhiro et al.
2002/0176259	A1	11/2002	Ducharme		2005/0213352	A1	9/2005	Lys
2002/0179816	A1	12/2002	Haines et al.		2005/0213353	A1	9/2005	Lys
2002/0195975	A1	12/2002	Schanberger et al.		2005/0218838	A1	10/2005	Lys
2003/0011538	A1	1/2003	Lys et al.		2005/0218870	A1	10/2005	Lys
2003/0028260	A1	2/2003	Blackwell		2005/0219860	A1	10/2005	Schexnaider
2003/0031015	A1	2/2003	Ishibashi		2005/0219872	A1	10/2005	Lys
2003/0057884	A1	3/2003	Dowling et al.		2005/0225979	A1	10/2005	Robertson et al.
2003/0057886	A1	3/2003	Lys et al.		2005/0231133	A1	10/2005	Lys
2003/0057887	A1	3/2003	Dowling et al.		2005/0236029	A1	10/2005	Dowling
2003/0057890	A1	3/2003	Lys et al.		2005/0236998	A1	10/2005	Mueller et al.
2003/0076281	A1	4/2003	Morgan et al.		2005/0248299	A1	11/2005	Chemel et al.
2003/0085710	A1	5/2003	Bourgault et al.		2005/0253533	A1	11/2005	Lys et al.
2003/0095404	A1	5/2003	Becks et al.		2005/0259424	A1	11/2005	Zampini et al.
2003/0100837	A1	5/2003	Lys et al.		2005/0265019	A1	12/2005	Sommers et al.
2003/0102810	A1	6/2003	Cross et al.		2005/0275626	A1	12/2005	Mueller et al.
2003/0133292	A1	7/2003	Mueller et al.		2005/0276051	A1	12/2005	Caudle et al.
2003/0137258	A1	7/2003	Piepgas et al.		2005/0276053	A1	12/2005	Nortrup et al.
2003/0185005	A1	10/2003	Sommers et al.		2005/0276064	A1	12/2005	Wu et al.
2003/0185014	A1	10/2003	Gloisten		2005/0285547	A1	12/2005	Piepgas et al.
2003/0189412	A1	10/2003	Cunningham		2006/0002110	A1	1/2006	Dowling et al.
2003/0222587	A1	12/2003	Dowling, Jr. et al.		2006/0012987	A9	1/2006	Ducharme et al.
2004/0003545	A1	1/2004	Gillespie		2006/0012997	A1	1/2006	Catalano et al.
2004/0012959	A1	1/2004	Robertson et al.		2006/0016960	A1	1/2006	Morgan et al.
2004/0036006	A1	2/2004	Dowling		2006/0022214	A1	2/2006	Morgan et al.
2004/0037088	A1	2/2004	English et al.		2006/0028155	A1	2/2006	Young
2004/0052076	A1	3/2004	Mueller et al.		2006/0028837	A1	2/2006	Mrakovich
2004/0062041	A1	4/2004	Cross et al.		2006/0034078	A1	2/2006	Kovacik et al.
2004/0075572	A1	4/2004	Buschmann et al.		2006/0050509	A9	3/2006	Dowling et al.
2004/0080960	A1	4/2004	Wu		2006/0050514	A1	3/2006	Opolka
2004/0090191	A1	5/2004	Mueller et al.		2006/0076908	A1	4/2006	Morgan et al.
2004/0090787	A1	5/2004	Dowling et al.		2006/0092640	A1	5/2006	Li
2004/0105261	A1	6/2004	Ducharme et al.		2006/0098077	A1	5/2006	Dowling
2004/0105264	A1	6/2004	Spero		2006/0104058	A1	5/2006	Chemel et al.
2004/0113568	A1	6/2004	Dowling et al.		2006/0109648	A1	5/2006	Trenchard et al.
2004/0116039	A1	6/2004	Mueller et al.		2006/0109649	A1	5/2006	Ducharme et al.
2004/0124782	A1	7/2004	Yu		2006/0109661	A1	5/2006	Coushaine et al.
2004/0130909	A1	7/2004	Mueller et al.		2006/0126325	A1	6/2006	Lefebvre et al.
2004/0141321	A1	7/2004	Dowling et al.		2006/0126338	A1	6/2006	Mighetto
2004/0155609	A1	8/2004	Lys et al.		2006/0132061	A1	6/2006	McCormick et al.
2004/0160199	A1	8/2004	Morgan et al.		2006/0132323	A1	6/2006	Grady, Jr.
2004/0178751	A1	9/2004	Mueller et al.		2006/0146531	A1 *	7/2006	Reo et al. .... 362/244
2004/0189218	A1	9/2004	Leong et al.		2006/0152172	A9	7/2006	Mueller et al.
2004/0189262	A1	9/2004	McGrath		2006/0158881	A1	7/2006	Dowling



EP 1147686 B1 1/2004  
 EP 1142452 B1 3/2004  
 EP 1145602 B1 3/2004  
 EP 1422975 A1 5/2004  
 EP 0890059 B1 6/2004  
 EP 1348319 B1 6/2005  
 EP 1037862 B1 7/2005  
 EP 1346609 B1 8/2005  
 EP 1321012 B1 12/2005  
 EP 1610593 A2 12/2005  
 EP 1415517 B1 5/2006  
 EP 1415518 B1 5/2006  
 EP 1438877 B1 5/2006  
 EP 1166604 B1 6/2006  
 EP 1479270 B1 7/2006  
 EP 1348318 B1 8/2006  
 EP 1399694 B1 8/2006  
 EP 1461980 B1 10/2006  
 EP 1110120 B1 4/2007  
 EP 1440604 B1 4/2007  
 EP 1047903 B1 6/2007  
 EP 1500307 B1 6/2007  
 EP 0922305 B1 8/2007  
 EP 0922306 B1 8/2007  
 EP 1194918 B1 8/2007  
 EP 1048085 B1 11/2007  
 EP 1763650 B1 12/2007  
 EP 1776722 B1 1/2008  
 EP 1459599 B1 2/2008  
 EP 1887836 A2 2/2008  
 EP 1579733 B1 4/2008  
 EP 1337784 B1 6/2009  
 GB 2215024 A 9/1989  
 GB 2324901 A 11/1998  
 JP 6-54103 U 7/1994  
 JP H6-54103 7/1994  
 JP 7-249467 9/1995  
 JP 08-162677 6/1996  
 JP 11-135274 A 5/1999  
 JP 2001-238272 A 8/2001  
 JP 2002-141555 A 5/2002  
 JP 3098271 U 2/2004  
 JP 2004-335426 11/2004  
 JP 2005-158363 A 6/2005  
 JP 2005-166617 A 6/2005  
 JP 2005-347214 A 12/2005  
 JP 2006-507641 A 3/2006  
 JP 3139714 U 2/2008  
 KR 10-2004-0008244 A 1/2004  
 KR 20-0430022 Y1 11/2006  
 KR 10-0781652 B1 12/2007  
 WO 9906759 A1 2/1999  
 WO 99/10867 A1 3/1999  
 WO 99/31560 A2 6/1999  
 WO 00/01067 A2 1/2000  
 WO 02/25842 A2 3/2002  
 WO 02/061330 A2 8/2002  
 WO 02/069306 A2 9/2002  
 WO 02/091805 A2 11/2002  
 WO 02/098182 A2 12/2002  
 WO 02/099780 A2 12/2002  
 WO 03/026358 A1 3/2003  
 WO 03/055273 A2 7/2003  
 WO 03/067934 A2 8/2003  
 WO 03/090890 A1 11/2003  
 WO 03/096761 A1 11/2003  
 WO 2004/021747 A2 3/2004  
 WO 2004/023850 A2 3/2004  
 WO 2004/032572 A2 4/2004  
 WO 2004/100624 A2 11/2004  
 WO 2005031860 A2 4/2005  
 WO 2005/052751 A2 6/2005  
 WO 2005/060309 A2 6/2005  
 WO 2005/084339 A2 9/2005  
 WO 2005/089293 A2 9/2005  
 WO 2005/089309 A2 9/2005  
 WO 2006/023149 A2 3/2006  
 WO 2006044328 A1 4/2006  
 WO 2006/093889 A2 9/2006

WO 2006/127666 A2 11/2006  
 WO 2006/127785 A2 11/2006  
 WO 2006/133272 A2 12/2006  
 WO 2006137686 A1 12/2006  
 WO 2007/081674 A1 7/2007  
 WO 2007/094810 A2 8/2007  
 WO 2007090292 A1 8/2007

OTHER PUBLICATIONS

Wolsey, Robert. Interoperable Systems: The Future of Lighting Control, Lighting Research Center, Jan. 1, 1997, vol. 2 No. 2, Rensselaer Polytechnic Institute, Troy, New York [online]. Retrieved Lighting Research Center Web Page using Internet <URL: <http://www.lrc.rpi.edu/programs/Futures/LF-BAS/index.asp>>.

Experiment Electronic Ballast. Electronic Ballast for Fluorescent Lamps [online], Revised Fall of 2007. [Retrieved on Sep. 1, 1997]. Retrieved from Virginia Tech Web Page using Internet <URL: <http://www.ece.vt.edu/ece3354/labs/ballast.pdf>>.

Truck-Lite, LEDSelect—LED, Model 35, Clearance & Marker Lighting, [online], [retrieved on Jan. 13, 2000] Retrieved from Truck-Lite Web Page using Internet <URL: <http://trucklite.com/leds14.html>>.

Truck-Lite, LEDSelect—LED, Super 44, Stop, Turn & Tail Lighting, [online], [retrieved on Jan. 13, 2000] Retrieved from Truck-Lite Web Page using Internet <URL: <http://trucklite.com/leds2.html>>.

Truck-Lite, LEDSelect—LED, Model 45, Stop, Turn & Tail Lighting [online], [retrieved on Jan. 13, 2000] Retrieved from Truck-Lite Web Page using Internet <URL: <http://trucklite.com/leds4.html>>.

Telecite Products & Services—Display Options, [online], [retrieved on Jan. 13, 2000] Retrieved from Telecite Web page using Internet <URL: <http://www.telecite.com/en/products/options.en.htm>>.

Traffic Signal Products—Transportation Products Group, [online], [retrieved on Jan. 13, 2000] Retrieved from the Dialight Web Page using Internet <URL: <http://www.dialight.com/trans.htm>>.

LED Lights, Replacement LED lamps for any incandescent light, [online], [retrieved on Jan. 13, 2000] Retrieved from LED Lights Web Page using Internet <URL: <http://www.ledlights.com/replac.htm>>.

LEDTRONICS, LEDTRONICS Catalog, 1996, p. 10, LEDTRONICS, Torrance, California.

Piper. The Best Path to Efficiency. Building Operating Management, Trade Press Publishing Company May 2000 [online], [retrieved on Jan. 17, 2008]. Retrieved from Find Articles Web Page using Internet <URL: [http://findarticles.com/p/articles/mi\\_qu3922/is\\_200005/ai\\_n8899499/](http://findarticles.com/p/articles/mi_qu3922/is_200005/ai_n8899499/)>.

Henson, Keith. The Benefits of Building Systems Integration. Access Control & Security Systems Integration, Oct. 1, 2000, Penton Media. [online], [retrieved on Oct. 24, 2008] Retrieved from Security Solutions Web page using Internet <URL: [http://securitysolutions.com/mag/security\\_benefits\\_building\\_systems/](http://securitysolutions.com/mag/security_benefits_building_systems/)>.

Phason Electronic Control Systems, Light Level Controller (LLC) case study. Nov. 30, 2004. 3 pages, Phason Inc., Winnipeg, Manitoba, Canada.

Airport International. Fly High With Intelligent Airport Building and Security Solutions [online], [retrieved on Oct. 24, 2008]. Retrieved from Airport International web page using Internet <URL: <http://www.airport-int.com/categories/airport-building-and-security-solutions/fly-high-with-intelligent-airport-building-and-security-solutions.html>>.

Spencer, Eugene. High Sales, Low Utilization. Green Intelligent Buildings, Feb. 1, 2007. [online]. Retrieved from Green Intelligent Buildings web page using Internet <URL: [http://www.greenintelligentbuildings.com/CDA/IBT\\_Archive/BNP\\_GUID\\_9-5-2006\\_A\\_1000000000000056772](http://www.greenintelligentbuildings.com/CDA/IBT_Archive/BNP_GUID_9-5-2006_A_1000000000000056772)>.

Sensor Switch, nLight Lighting Control System, [online], [retrieved on Jan. 11, 2008] Retrieved from Sensor Switch web page using Internet <URL: <http://www.sensorswitch.com>>.

Six Strategies, [online], [retrieved on Jan. 11, 2008] Retrieved from Encelium Technologies Inc. Web Page using Internet <URL: <http://www.encelium.com/products/strategies.html>>.



Lawrence Berkeley National Laboratory. Lighting Control System—Phase Cut Carrier. University of California, [online] [retrieved on Jan. 14, 2008] Retrieved from Lawrence Berkeley National Laboratory web page using Internet <URL: <http://www.lbl.gov/tt/techs/lbnl1871.html>>.

Best Practice Guide—Commercial Office Buildings—Central HVAC System. [online], [Retrieved on Jan. 17, 2008] Retrieved from Flex Your Power Organization web page using Internet <URL: [http://www.fypower.org/bpg/module.html?b=offices&m+Central HVAC Systems&s=Contr . . .](http://www.fypower.org/bpg/module.html?b=offices&m+Central+HVAC+Systems&s=Contr...)>.

www.fypower.org/bpg/module.html?b=offices&m+Central HVAC Systems&s=Contr . . . >.

Cornell University. Light Canopy—Cornell University Solar Decathlon, [online], [retrieved on Jan. 17, 2008] Retrieved from Cornell University web page using Internet <URL: <http://cusd.cornell.edu/cusd/web/index.php/page/show/section/Design/page/controls>>.

\* cited by examiner

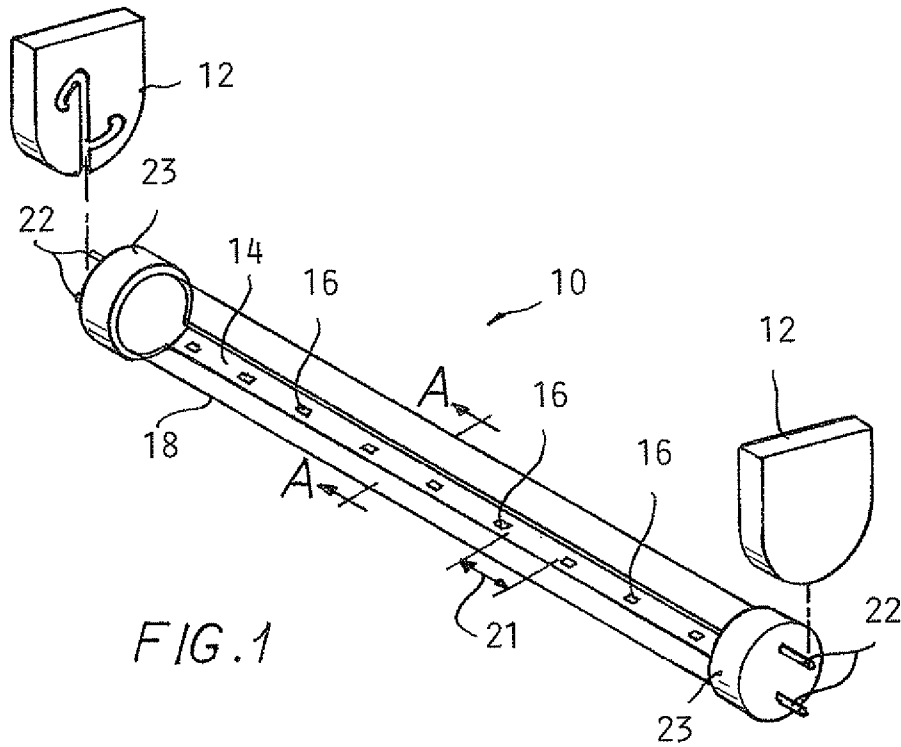


FIG. 1

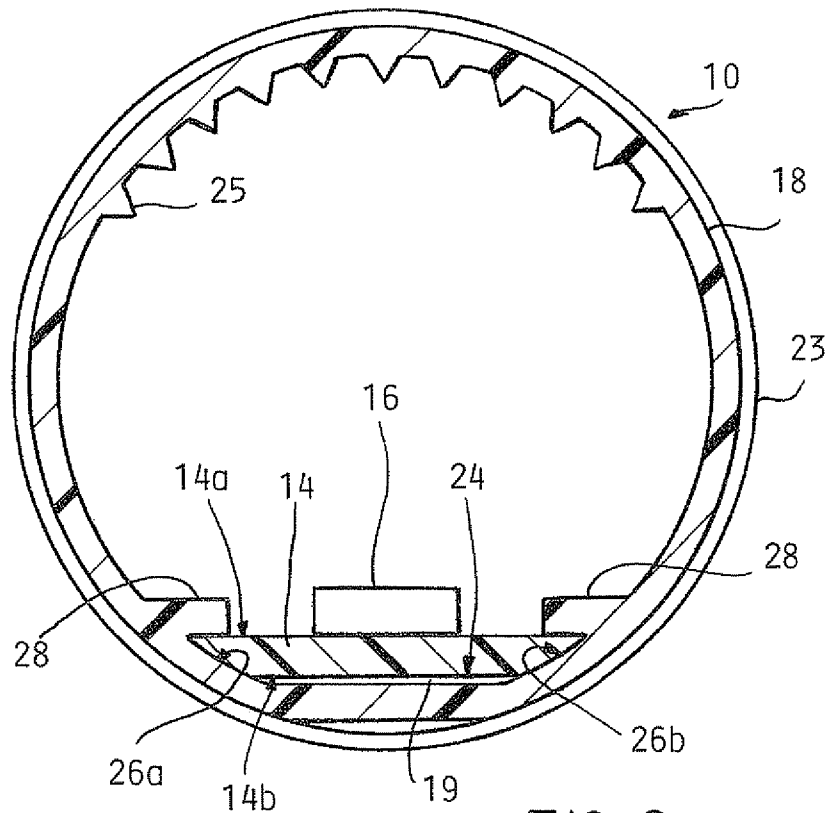


FIG. 2

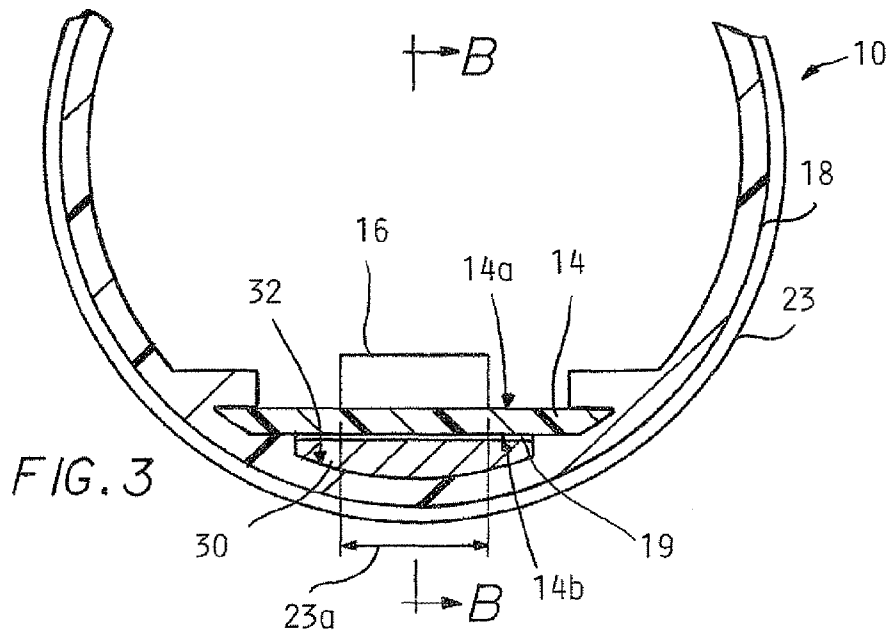


FIG. 3

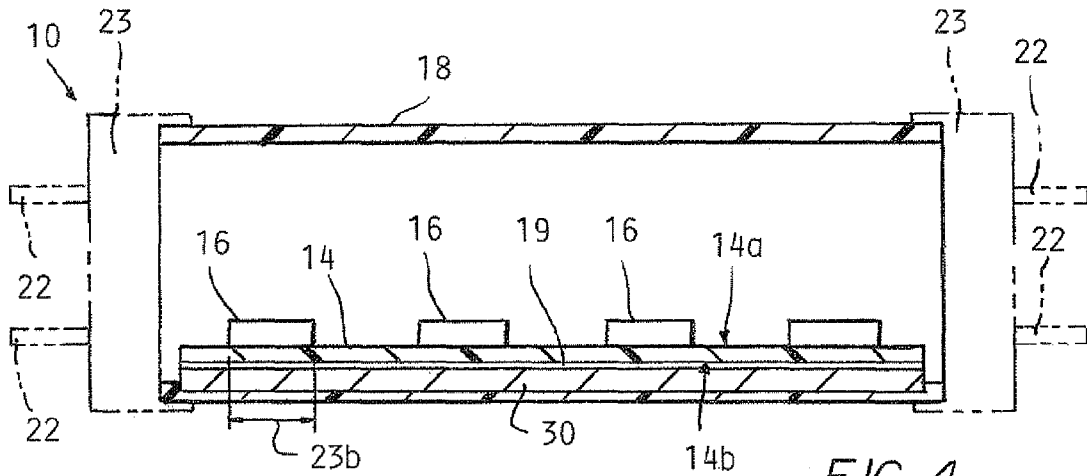


FIG. 4

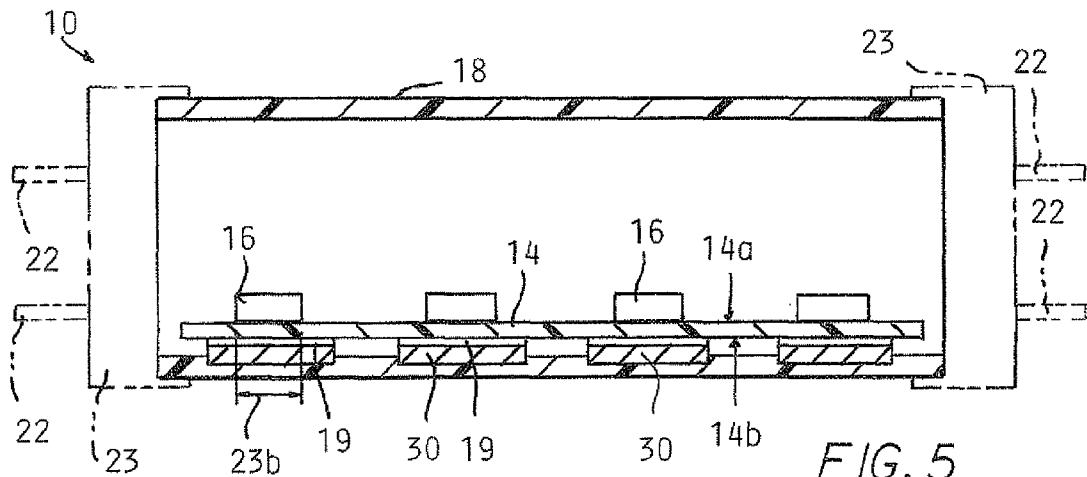
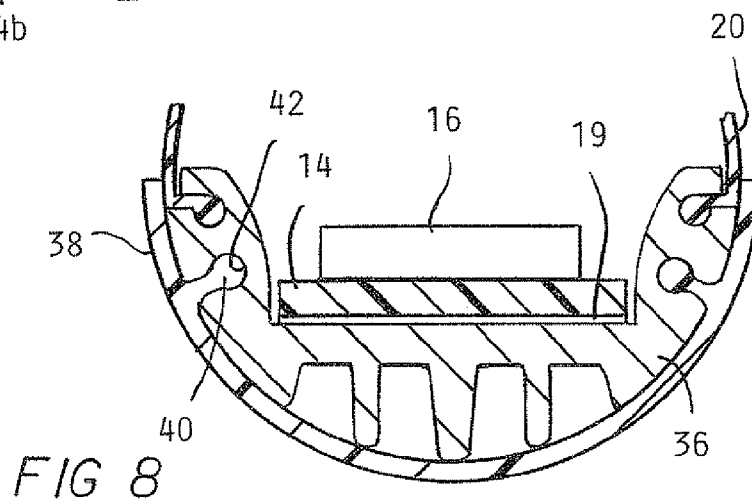
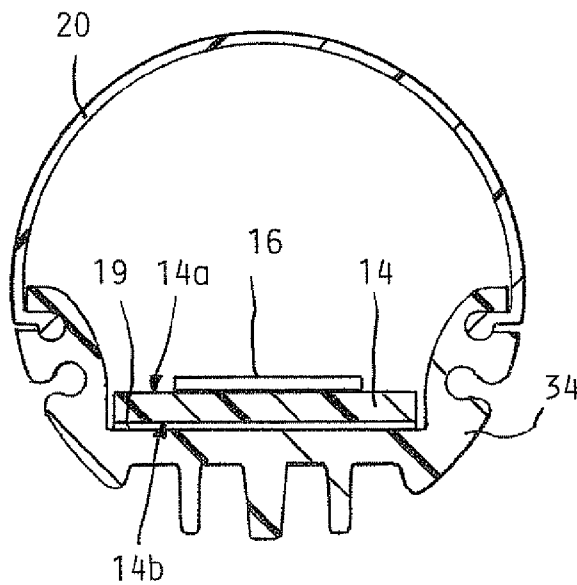
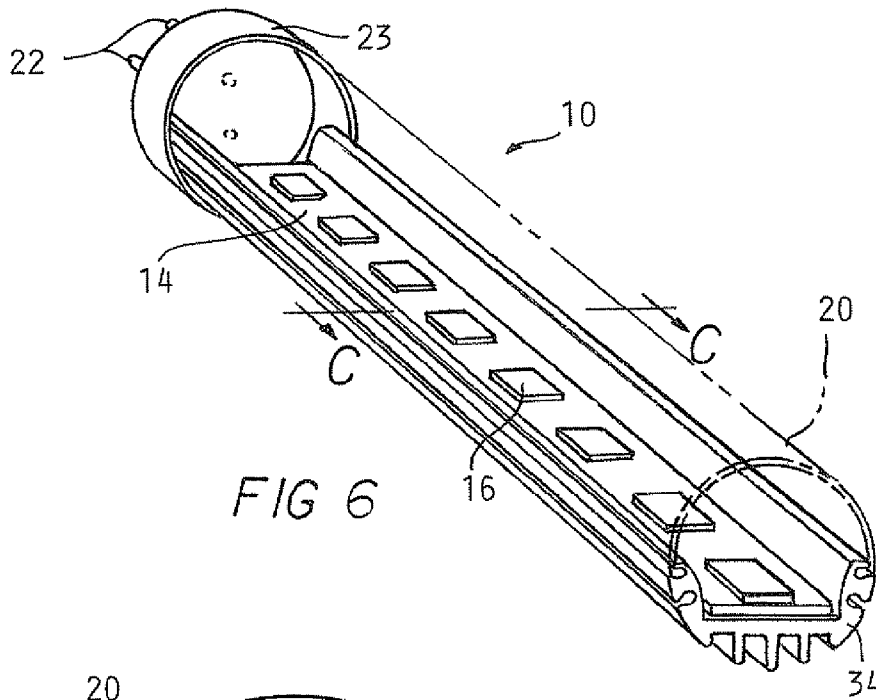


FIG. 5



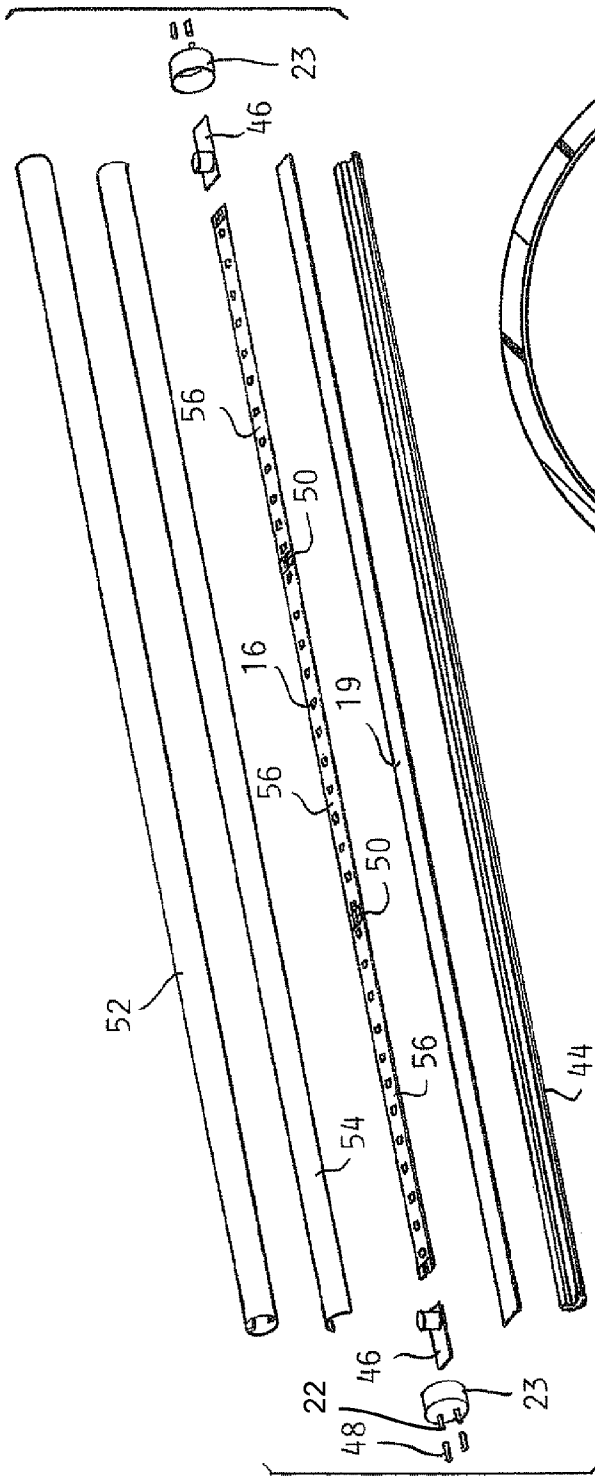


FIG. 9

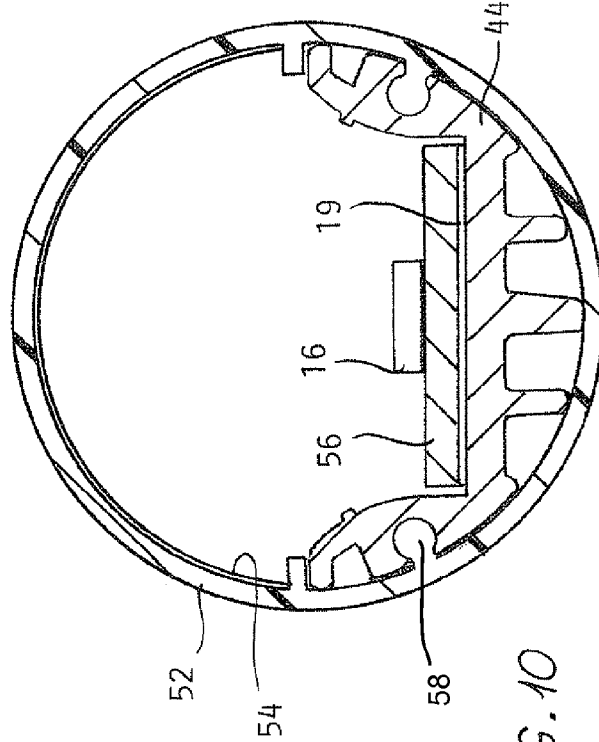
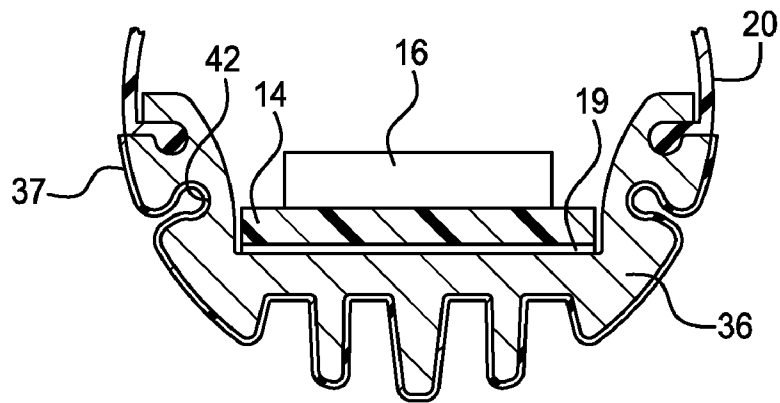


FIG. 10



*FIG. 11*

1

## ELECTRIC SHOCK RESISTANT L.E.D. BASED LIGHT

### TECHNICAL FIELD

The present invention relates to a light emitting diode (LED) based light for replacing a conventional fluorescent light in a fluorescent light fixture.

### BACKGROUND

Fluorescent tube lights are widely used in a variety of locations, such as schools and office buildings. Although conventional fluorescent bulbs have certain advantages over, for example, incandescent lights, they also pose certain disadvantages including, inter alia, disposal problems due to the presence of toxic materials within the glass tube.

LED-based tube lights which can be used as one-for-one replacements for fluorescent tube lights having appeared in recent years. One such LED-based fluorescent replacement light includes LEDs mounted on an elongated circuit board in a semi-cylindrical metal housing which also serves as a heat sink for the LEDs. A U-shaped lens snaps onto the heat sink to cover the LEDs and disperse light from them.

### BRIEF SUMMARY

The inventors have discovered that the LED-based fluorescent tube replacement lights with exposed metal heat sinks as described above can present a shock hazard during installation. Ballasts in some fluorescent fixtures provide up to 1000 V at 40 kHz and higher to generate the initial striking voltage necessary for starting a conventional fluorescent light. If during installation of the LED-based light one end of the LED-based light is plugged into the fluorescent fixture while power is being provided to the fixture, the ballast may detect the incomplete circuit and provide the high-frequency starting voltage designed for starting a fluorescent light to the LED-based light. The high-frequency starting voltage provided by the ballast causes a high voltage across the circuit board in the LED-based light. Because the heat sink in the LED-based light is positioned closely to the circuit board, the high-frequency starting voltage can cause parasitic capacitive coupling between the circuit board and the heat sink, thereby producing a charge in the heat sink. A person installing the LED-based light is often touching the metal heat sink, providing a ground for the charge to pass through and resulting in a significant electrical shock to the person.

The present invention eliminates the shock hazard potential present in LED-based lights of the type having exposed metal heat sinks while still providing sufficient thermal management of heat produced by the LEDs. In general, a shock-resistant replacement light for a conventional fluorescent tube light usable in a conventional fluorescent fixture includes a generally tubular body of high-dielectric material forming the outer surface of the light over substantially its entire length. A circuit board structure is disposed within the body and thermally joined thereto while being electrically insulated therefrom. A pair of end caps carrying bi-pin connectors is disposed on the opposite ends of the body. An array of high-powered LEDs is arranged longitudinally along the circuit board and thermally bonded thereto, the number and spacing of the LEDs being such as to uniformly and fully occupy the space between the end caps. The body is translucent at least in part so as to permit the transmission of light from the LEDs through the body. At least some of the connectors on the end caps are electrically connected to the LEDs.

2

In one illustrative embodiment, a LED-based light for replacing a conventional fluorescent light bulb in a fluorescent light fixture includes a tubular housing defined at least in part by a high-dielectric light transmitting portion. At least a radially outer portion of the entire tubular housing is formed of a high-dielectric material. Multiple LEDs and a circuit board structure defining a LED-mounting side and a primary heat transferring side opposite the LED-mounting side are included. The multiple LEDs are mounted on the LED-mounting side at predetermined intervals along a length of the circuit board for emitting light through the light transmitting portion of the tubular housing. At least areas of the primary heat transferring side directly underlying the respective LEDs are in thermally conductive relation with the tubular housing for highly electrically insulated thermal transmission of heat generated by the multiple LEDs from the circuit board to an ambient environment surrounding an exterior of the tubular housing. At least one electrical connector at a longitudinal end of the tubular housing is in electrical communication with the circuit board.

In another illustrative embodiment, a LED-based light for replacing a conventional fluorescent tube includes an elongated high-dielectric translucent tube. An elongated highly thermally conductive heat sink is disposed within the tube. An array of high-power LEDs and a circuit board structure extending substantially the length of the heat sink are included. The circuit board defines a LED-mounting side of the circuit board and a primary heat transferring side of the circuit board opposite the LED-mounting side. The LEDs are mounted on the LED-mounting side at predetermined intervals along the length of the circuit board for uniformly emitting light through an arc of the tube, the circuit board is mounted to the heat sink with the primary heat transferring side of the circuit board in thermally conductive relation with the heat sink for highly electrically insulated thermal transmission of heat generated by the LEDs from the circuit board to an ambient environment surrounding an exterior of the tube. A light diffusing lens is positioned between the circuit board and the tube. A pair of end caps is disposed on the opposite ends of the tube and carrying bi-pin connectors, and at least some of the connectors on the end caps are electrically connected to the LEDs.

### BRIEF DESCRIPTION OF THE DRAWINGS

The description herein makes reference to the accompanying drawings wherein like reference numerals refer to like parts throughout the several views, and wherein:

FIG. 1 is a perspective view of a LED-based replacement light in accordance with the invention and a fluorescent fixture;

FIG. 2 is a cross-section view of the LED-based replacement light of FIG. 1 at a position similar to line A-A;

FIG. 3 is a cross-section view of another LED-based replacement light in accordance with the invention along a line similar to line A-A in FIG. 1;

FIG. 4 is a cross-section view of the LED-based replacement light of FIG. 3 along line B-B;

FIG. 5 is a cross-section view of another LED-based replacement light in accordance with the invention along a line similar to line B-B in FIG. 3;

FIG. 6 is a perspective view of another LED-based replacement light with an exposed heat sink in accordance with the invention;

FIG. 7 is a cross-section view of the LED-based replacement light of FIG. 6 along line C-C;

3

FIG. 8 is a cross-section view of another LED-based replacement light in accordance with the present invention along a line similar to line C-C in FIG. 6;

FIG. 9 is an exploded view of another LED-based replacement light in accordance with the present invention;

FIG. 10 is a cross-section view of the LED-based replacement light of FIG. 9 along a line similar to line C-C in FIG. 6; and

FIG. 11 is a cross-section view of another LED-based replacement light in accordance with the present invention along a line similar to line C-C in FIG. 6.

#### DETAILED DESCRIPTION OF EMBODIMENTS OF THE INVENTION

FIGS. 1-10 illustrate LED-based replacement lights 10 according to the present invention for replacing a conventional fluorescent light bulb in a fluorescent fixture 12. The lights 10 each include a circuit board 14, multiple LEDs 16, a tubular housing at least partially defined by a high-dielectric translucent portion, and bi-pin electrical connectors 22 affixed to plastic end caps 23.

FIGS. 1 and 2 show an illustrative embodiment of the present invention in which the tubular housing consists of a tube 18. The circuit board 14 has a LED-mounting side 14a and a primary heat transferring side 14b opposite the LED-mounting side 14a. The circuit board 14 may be made in one piece or in longitudinal sections joined by electrical bridge connectors. The circuit board 14 and the tube 18 are in thermally conductive relation with the circuit board 14 attached to the tube 18 using highly thermally conductive adhesive transfer tape 19. The circuit board 14 can alternatively be positioned in a thermally conductive relation with the tube 18 by attaching the circuit board 14 to the tube 18 using screws, glue, a friction fit, and other attachments known to those of skill, in which cases thermal grease can be applied between the circuit board 14 and tube 18. The circuit board 14 is preferably one on which metalized conductor patterns can be formed in a process called "printing" to provide electrical connections from the connectors 22 to the LEDs 16 and between the LEDs 16 themselves. An insulative board is typical, but other circuit board types, e.g., metal core circuit boards, can alternatively be used.

The LEDs 16 are mounted at predetermined intervals 21 along the length of the circuit board 14 to uniformly emit light through a portion the tube 18. Although the LEDs 16 are shown as high-power surface-mount devices of a type available from Nichia, other types can be used. The term "high-power" means LEDs 16 with power ratings of 0.25 watts or more. Preferably, the LEDs 16 have power ratings of one watt or more. Also, although surface-mounted LEDs 16 are shown, one or more organic LEDs can be used in place of or in addition thereto.

The spacing 21 between LEDs 16 along the circuit board 14 is a function of the length of the tube 18, the amount of light desired, the wattage of the LEDs 16, and the viewing angle of the LEDs 16. For a 48" light 10, the number of LEDs 16 may vary from about thirty to sixty such that the light 10 outputs approximately 3,000 lumens, and the spacing 21 between the LEDs 16 varies accordingly. The arrangement of LEDs 16 on the circuit board 14 is such as to substantially fill the entire space between the end caps 23.

Still referring to FIGS. 1 and 2, the tube 18 includes a longitudinally extending flat interior surface 24 for supporting the circuit board 14. The surfaces 26a and 26b of the tube 18 on either side of the circuit board 14 are optionally contoured to the sides of the circuit board 14. The exterior of the

4

tube 18 can optionally be D-shaped, with the exterior flat portion corresponding to the location of the flat interior surface 24. The tube 18 can be formed of polycarbonate, acrylic, glass, or another high-dielectric light transmitting material. As used herein, the term "high-dielectric" means a material which has a low conductivity to direct current; e.g., an insulator.

The tube 18 includes optional tabs 28 for securing the circuit board 14. The tabs 28 project from the tube 18 on opposite sides of the circuit board 14 and contact the LED-mounting side 14a of the circuit board 14. The tabs 28 are preferably formed integrally with the tube 18 by, for example, extruding the tube 18 to include the tabs 28. Each tab 28 can extend the entire length of the tube 18, though a series of discrete tabs 28 can alternatively be used to secure the circuit board 14.

The light 10 can include features for uniformly distributing light to the environment to be illuminated in order to replicate the uniform light distribution of a conventional fluorescent bulbs the light 10 is intended to replace. As described above, the spacing 21 of the LEDs 16 can be designed for uniform light distribution. Additionally, the tube 18 can include light diffracting structures, such as the illustrated longitudinally extending ridges 25 formed on the interior of the tube 18. Alternatively, light diffracting structures can include dots, bumps, dimples, and other uneven surfaces formed on the interior or exterior of the tube 18. The light diffracting structures can be formed integrally with the tube 18, for example, by molding or extruding, or the structures can be formed in a separate manufacturing step such as surface roughening. The light diffracting structures can be placed around an entire circumference of the tube 18, or the structures can be placed along an arc of the tube 18 through which a majority of light passes. In addition or alternative to the light diffracting structures, a light diffracting film can be applied to the exterior of the tube 18 or placed in the tube 18, or the material from which the tube 18 is formed can include light diffusing particles.

Alternatively to the tube 18 illustrated in FIGS. 1 and 2, the tube 18 can be made from a dielectric light transmitting lens portion extending at least a length and arc of the housing 18 through which the LEDs 16 emit light and a dielectric dark body portion attached to the light transmitting portion and in thermally conductive relation with the circuit board 14. Due to its dark color, the dark body portion dissipates a greater amount of heat to the ambient environment than a lighter colored body.

End caps 23 carrying bi-pin connectors 22 are attached to each longitudinal end of the tube 18 for physical and electrical connection of the light 10 to the fixture 12. Since the LEDs 16 in the present embodiment are directionally oriented, the light 10 should be installed at a proper orientation relative to a space to be illuminated to achieve a desired illumination effect. Bi-pin connectors 22 allow only two light 10 installation orientations, thereby aiding proper orientation of the light 10. While the end caps 22 are shown as cup-shaped structures that slide over longitudinal ends of the tube 18, alternative end caps that fit into the tube 18 can be used in place of the illustrated cup-shaped end caps 22. Also, only two of the four illustrated pins 22 must be active; two of the pins 22 can be "dummy pins" for physical but not electrical connection to the fixture 12. Bi-pin connectors 22 are compatible with many fluorescent fixtures 12, though end caps 23 with alternative electrical connectors, e.g., single pin end caps, can be used in place of end caps 22 carrying bi-pin connectors 23 when desired.



Positioning the circuit board **14** in thermally conductive relation with the tube **18** provides sufficient heat dissipation for the LEDs **16** to function well. In most heat transfer applications, the factor limiting the heat dissipating ability of a structure is the thermal resistance of an air film at the outer surface of the structure, necessitating the use of a highly thermally conductive metal exposed to the ambient environment in order to sufficiently dissipate heat. However, the tube **18** has such a large external surface area that the factor limiting the ability of the light **10** to dissipate heat is conduction from the LEDs **16** to the exterior of the tube **18**. Positioning the primary heat transferring side **14b** of the circuit board **14** in thermally conductive relation with the tube **18** provides sufficient heat conduction from the LEDs **16** to the exterior of the tube **18** for operation of the LEDs **16** even when the tube **18** is not constructed from a highly thermally conductive material. As a result, the tube **18** can be constructed from a low thermally conductive material.

The ability to use a low thermally conductive material for the tube **18** eliminates the shock hazard associated with capacitive coupling between the circuit board and heat sink of conventional LED-based replacement lights. Polycarbonate, acrylic, glass, and most other low thermally conductive materials from which the tube **18** can be constructed are also high-dielectric materials. Since the tube **18** in the present embodiment provides sufficient heat dissipation despite being constructed from a high-dielectric material, the light **10** need not include a highly thermally conductive structure positioned close to the circuit board **14** for dissipating heat. Thus, the light **10** as illustrated in FIGS. **1** and **2** need not include a highly electrically conductive heat sink that can be charged to a sufficient level as a result capacitive coupling to shock a person handling the light **10**.

FIGS. **3-5** show additional illustrative embodiments of a LED-based light **10** according to the present invention. The embodiments of the light **10** in FIGS. **3-5** are identical to the embodiment illustrated in FIGS. **1** and **2**, except the lights **10** in FIGS. **3-5** includes a highly-thermally conductive heat spreader **30** in thermally conductive relation with both the primary heat transferring side **14b** of the circuit board **14** and an interior surface **32** of the tube **18**. The thermally conductive relation between the circuit board **14** and the heat spreader **30** is achieved using thermally conductive adhesive transfer tape **19** for attaching the circuit board **14** to the heat spreader **30** as shown in FIGS. **3-5**, though the circuit board **14** can alternatively be attached to the heat spreader **30** using screws, glue, a friction fit, and other attachments known to those of skill, in which cases thermal grease can be applied between the circuit board **14** and heat spreader **30**. The heat spreader **30** can be a continuous mass extending the length of the circuit board **14** as illustrated in FIG. **4**, or multiple discrete heat spreaders **30** can be placed between areas **23** (each area **23** is the product of a width **23a** as shown in FIG. **3** and a length **23b** as shown in FIGS. **4** and **5**) of the circuit board **14** directly underlying the LEDs **16** as illustrated in FIG. **5**.

The use of a heat spreader **30** increases the thermal efficiency of the light **10** by spreading heat produced by the LEDs **16** out over a greater area of the tube **18** relative to the transferring heat directly from the circuit board **14** to the tube **18**. Additionally, even though the heat spreader **30** can be formed of aluminum or another highly thermally conductive material that is also highly electrically conductive, the lights **10** of the embodiments in FIGS. **3-5** eliminate the shock hazard potential because the heat spreader **30** is enclosed by the high-dielectric tube **18**. The thickness of the tube **18** is a factor of dielectric properties of the tube **18** material, the amount the heat spreader **30** can be expected to become

charged due to capacitive coupling, and the amount of charge that can safely be transmitted to a person handling the light **10**.

FIGS. **6** and **7** show another illustrative embodiment of the present invention in which the tubular housing of the LED-based replacement light **10** is formed by engaging a high-dielectric translucent lens **20** with a highly thermally conductive, high-dielectric heat sink **34**. The circuit board **14** is mounted in thermally conductive relation with the heat sink **34** by attaching the circuit board **14** to the heat sink **34** using highly thermally conductive adhesive transfer tape **19**, though the circuit board **14** can also be mounted to the heat sink **34** using screws, glue, a friction fit, and other attachment methods known to those of skill in the art to achieve the desired thermally conductive relation, in which cases thermal grease can be applied between the circuit board **14** and heat sink **34**.

The lens **20** can be made from polycarbonate, acrylic, glass, or another high-dielectric light transmitting material. The lens **20** can include light diffracting structures, such as the longitudinally extending ridges **25** included in the tube **18** of FIG. **2**. Alternatively, light diffracting structures can include dots, bumps, dimples, and other uneven surfaces formed on the interior or exterior of the lens **20**. A light diffracting film can be applied to the exterior of the lens **20** or placed between the lens **20** and heat sink **34**. The lens **20** can be formed of a material including light diffusing particles. The term "lens" as used herein means a light transmitting structure, and not necessarily a structure for concentrating or diverging light.

The lens **20** and heat sink **34** can be engaged such a large surface area of the heat sink **34** is exposed to the ambient environment. For example, the engagement between the lens **20** and heat sink **34** can be as described in U.S. application Ser. No. 12/040,901, which is hereby incorporated by reference in its entirety. Alternatively, glue, screws, tape, a snap or friction fit, or other means known to those of skill in the art can be used to engage the lens **20** with the heat sink **34**.

Since the heat sink **34** is arranged in close proximity to the circuit board **14** and exposed to the ambient environment, the heat sink **34** is made from a high-dielectric material to eliminate the shock hazard potential. Moreover, it is desirable that the heat sink **34** be made from a material that is highly thermally conductive in addition to being a high-dielectric, such as a D-Series material by Cool Polymers of Warwick, R.I. The use of a highly thermally conductive, high-dielectric material allows the heat sink **34** to efficiently transfer heat to the ambient environment. To aid in heat dissipation, the heat sink **34** can include fins for increasing its surface area and heat dissipating ability. Since the heat sink **34** is highly dielectric, the light **10** can be installed one end at a time while power is being applied without becoming charged to a large enough degree to present a shock hazard to the installer.

FIG. **8** is another illustrative embodiment including a heat sink **36** engaged with the lens **20**. The heat sink **36** can be made from a material that is highly thermally conductive and highly electrically conductive, such as aluminum. A high-dielectric heat sink cover **38** overlays the heat sink **36** forming an exterior portion of the tubular housing. The heat sink cover **38** attaches to the heat sink **36** by slidably engaging rounded-end projections **40** formed in the cover **38** with grooves **42** formed in the heat sink **36**. Alternative forms of attachment, such as screws, highly thermally conductive adhesive tape, friction fit and other attachments known to those of skill in the art are alternatively usable. Also, the cover **38** can be shaped to the contours of the heat sink **36**. For example, the heat sink **36** can be coated or wrapped with a high-dielectric material. An example coating **37** is shown in FIG. **11**. FIG. **11** is similar

to the embodiment shown in FIG. 8. The thickness of the cover 38 is a factor of dielectric properties of the cover's 38 material, the amount the heat sink 36 can be expected to become charged due to capacitive coupling, and the amount of charge that can safely be transmitted to a person handling the light 10.

The heat sink cover 38 is preferably made of a high-dielectric and highly thermally conductive material, such as a D-Series material by Cool Polymers of Warwick, R.I., though the heat sink cover 38 need not necessarily be highly thermally conductive. With the heat sink cover 38 attached to the heat sink 36, a radially outer portion of the tubular housing consisting of the lens 20 and the cover 38 is formed of high-dielectric materials, thereby eliminating a shock hazard potential resulting from capacitive coupling of the circuit board 14 and heat sink 36.

FIG. 9 illustrates another embodiment of the present invention. A cylindrical high-dielectric cover 52 circumscribes a heat sink 44 and an optional bi-axially diffusing lens 54. The cylindrical cover 52 can be an approximately 0.002" thick tube of clear polycarbonate, acrylic, glass, or other high-dielectric transparent materials known to those of skill in the art. The thickness of the cover 52 can vary depending on the dielectric properties of the material from which the cover 52 is made and the expected amount of charge on the heat sink 44 in the event of capacitive coupling. Also, the thickness of the cover 52 can be designed such that the cover 52 provides structural support for the light 10, if desired. The cover 52 can include integral tabs 58 extending longitudinally, and the cover 52 can be formed by, for example, extrusion. The tabs 58 allow the heat sink 44 to be securely slidably engaged with the cover 52. Likewise, the bi-axially diffusing lens 54 can be slidably engaged on the opposing side of the tabs 58 from the heat sink 44. Alternatively, the cover 52 can be a high-dielectric layer wrapped around the heat sink 44 and lens 54.

The optional bi-axially diffusing lens 54 preferably provides approximately 15° of diffraction to approximate the appearance of a conventional fluorescent tube. Instead of a separate lens 54, other diffractive structure can be used. For example, the cover 52 can optionally include light diffracting structures, such as ridges 25, described above in relation to the tube 18. If desired, the light 10 need not include the lens 54 or any other diffractive structures.

A circuit board structure carrying high-power LEDs 16 includes multiple circuit boards 56 attached by electrical bridge connectors 50. Alternatively, the circuit board structure can include a single circuit board or other electric circuitry. The circuit board structure is attached to the heat sink 44 using highly thermally conductive adhesive transfer tape 19. The circuit board structure can alternatively be attached with screws, glue, a friction fit, and other attachments known to those of skill, in which cases thermal grease can be applied between the circuit board structure and the heat sink 44. End caps 23 carrying bi-pin connectors 22 can be slidably engaged over the ends of the cover 52, with screws 48 securing the ends caps 23 to the heat sink 44. Alternative end caps can be used as described above. Electrical components 46 can be attached to the circuit board structure in electrical communication between the pins 22 and the LEDs 16 for manipulation of the current provided by the socket 12 as necessary.

Providing the cover 52 allows the use of a highly thermally and electrically conductive heat sink 44, e.g., an extruded aluminum heat sink, because the dielectric properties of the cover 52 reduce the shock hazard potential of capacitive coupling between the circuit board structure and the heat sink 44. Additionally, the cover 52 can provide structural support and

The above-described embodiments have been described in order to allow easy understanding of the invention and do not limit the invention. On the contrary, the invention is intended to cover various modifications and equivalent arrangements included within the scope of the appended claims, which scope is to be accorded the broadest interpretation so as to encompass all such modifications and equivalent structure as is permitted under the law.

What is claimed is:

1. An LED-based light for replacing a conventional fluorescent tube comprising:
  - an elongated highly thermally conductive heat sink having a radially outer portion;
  - an elongated high-dielectric lens engaging the heat sink and forming a first portion of a housing for the LED-based light;
  - a high-dielectric cover engaging the heat sink and overlaying substantially all of the radially outer portion of the heat sink to form a second portion of the housing for the LED-based light separate from the first portion such that the cover isolates the radially outer portion of the heat sink from an ambient environment surrounding the LED-based light;
  - a plurality of LEDs;
  - a circuit board structure extending substantially the length of the heat sink, the circuit board defining a LED-mounting side of the circuit board and a primary heat transferring side of the circuit board opposite the LED-mounting side, the LEDs mounted on the LED-mounting side at predetermined intervals along the length of the circuit board for uniformly emitting light through an arc of the lens, the circuit board mounted directly to the heat sink on a surface opposing the radially outer portion of the heat sink with the primary heat transferring side of the circuit board in thermally conductive relation with the heat sink and substantially all of the radially outer portion of the heat sink in thermally conductive relation with the high-dielectric cover for highly electrically insulated thermal transmission of heat generated by the LEDs from the circuit board to the ambient environment surrounding the LED-based light; and
  - a pair of end caps disposed on the opposite ends of the housing, at least one end cap carrying at least one connector configured to electrically connect the LEDs to an existing fixture.
2. The LED-based light of claim 1, wherein the cover includes at least one projection having a rounded end on an interior portion thereof and the radially outer portion of the heat sink includes at least one corresponding groove configured to attach the cover to the heat sink.
3. The LED-based light of claim 1, wherein the exterior of the cover is configured to highly insulate a portion of the housing from a charge occurring as a result of parasitic capacitive coupling between the heat sink and the circuit board as a result of high-frequency starting voltage designed for starting a conventional fluorescent tube being applied across the circuit board.
4. The LED-based light of claim 1, wherein the lens and the cover define an entire exterior of the housing.
5. The LED-based light of claim 1, wherein the at least one connector is a bi-pin connector.
6. An LED-based light for replacing a conventional fluorescent tube comprising:
  - a housing including a light transmitting high dielectric lens and a high dielectric cover separate from the lens, the lens and the cover forming an exterior of the housing;
  - an elongate circuit board disposed within the housing;

9

a plurality of LEDs mounted along a length of the circuit board;

an elongate heat sink disposed within the housing, the heat sink having an interior circuit board mounting surface opposing a radially outer surface, the circuit board mounted in thermally conductive relation to the circuit board mounting surface, the cover contoured to the radially outer surface and attached in thermally conductive relation to the radially outer surface to directly isolate the radially outer surface from an ambient environment exterior of the housing from a charge occurring in the heat sink as a result of parasitic capacitive coupling between the heat sink and the circuit board resulting from a high-frequency starting voltage designed for starting a conventional fluorescent tube being applied across the circuit board while transmitting heat from the radially outer surface to the ambient environment, and the lens attached to the heat sink and extending adjacent to the LEDs such that light generated by the LEDs transmitted through an arc of the lens; and

10

a pair of end caps disposed on opposing ends of the housing, each end cap including at least one connector configured to physically and electrically connect the LEDs to a conventional fluorescent light fixture.

7. The LED-based light of claim 6, wherein the LEDs are mounted along the length of the circuit board at predetermined intervals for uniformly emitting light through the arc of the lens.

8. The LED-based light of claim 6, wherein the cover includes at least one projection having a rounded end on an interior portion thereof and the radially outer surface of the heat sink includes at least one corresponding groove configured to attach the cover to the heat sink.

9. The LED-based light of claim 6, wherein the cover is composed from a low thermally conductive material.

10. The LED-based light of claim 6, wherein the cover is composed from one of a polycarbonate, acrylic or glass material.

\* \* \* \* \*