

Troffer LED Fixtures

- Universal voltage (120-277 VAC)
- Dimmable options (120 VAC)
- 2 and 3-lamp models
- 2x2 and 2x4 models
- No ballast
- 50,000 hour life
- Excellent light distribution and output



toggled LED fixtures provide easy installation of direct wire LED tubes in many commercial, industrial, and institutional applications. By utilizing standard linear fluorescent bi-pin connected lamps, future maintenance and upgrades are possible without fixture replacement or rewiring.

Outstanding Product Performance

- 60-75% energy savings
- Eliminates ballasts and maintenance costs
- Designed for direct connection to building AC power, voltage 120-277 VAC 50-60Hz
- Rapid payback for high-demand applications
- Eligible for available state and energy credit programs and utility incentives

Superior Quality of Light

- Consistent color rendering, 80 CRI standard
- UL 1598C

Commercial-grade

- Designed and engineered in U.S.A.
- Instant start in cold
- Shatterproof construction
- Suitable for damp locations
- No mercury

Ordering Information

Fixture	Type	Length	# Lamps	Style	Lens	Wire Termination	Tube Model #
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
F = Fixture	T = Troffer	2 = 2 feet 4 = 4 feet	2 = 2 lamps 3 = 3 lamps	0 = Standard	I = Indirect P = Prismatic	0 = None E = 8' 5-15 Whip	See next page



Troffer LED Fixtures



White Light Tube Options with Fixtures

Model No.	Length	Input Voltage	Power (Watts)	Total Lumens	Efficacy	CRI	CCT	PF
E416-40310	4 feet	120-277 VAC	16	2100	131	≥80	4000K	≥0.9
E416-50310	4 feet	120-277 VAC	16	2100	131	≥80	5000K	≥0.9
E208-40310	2 feet	120-277 VAC	8	1120	140	≥80	4000K	≥0.9
E208-50310	2 feet	120-277 VAC	8	1120	140	≥80	5000K	≥0.9
D416-40311	4 feet	120 VAC	16	1700	106	≥80	4000K	≥0.9
D416-50311	4 feet	120 VAC	16	1700	106	≥80	5000K	≥0.9
A423-40230	4 feet	120-277 VAC	23	3100	135	≥80	4000K	≥0.9
A423-50230	4 feet	120-277 VAC	23	3100	135	≥80	5000K	≥0.9

All fixtures available with power cord at additional charge

Photometrics

IES files available upon request

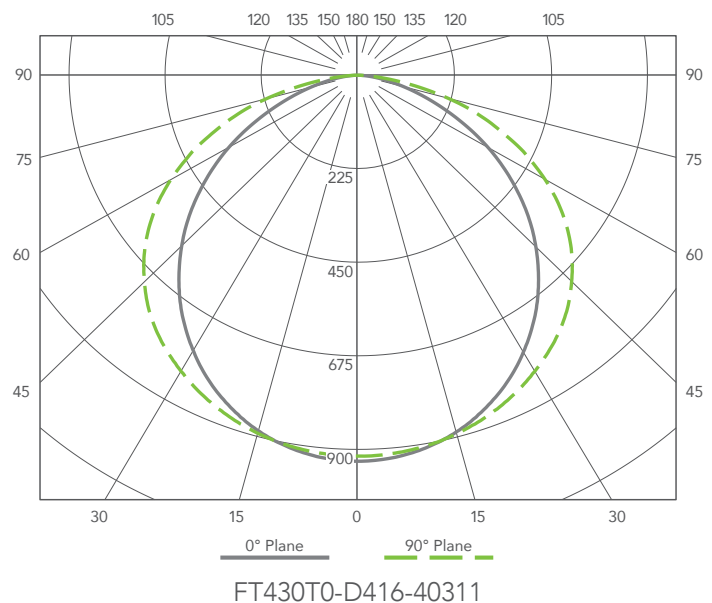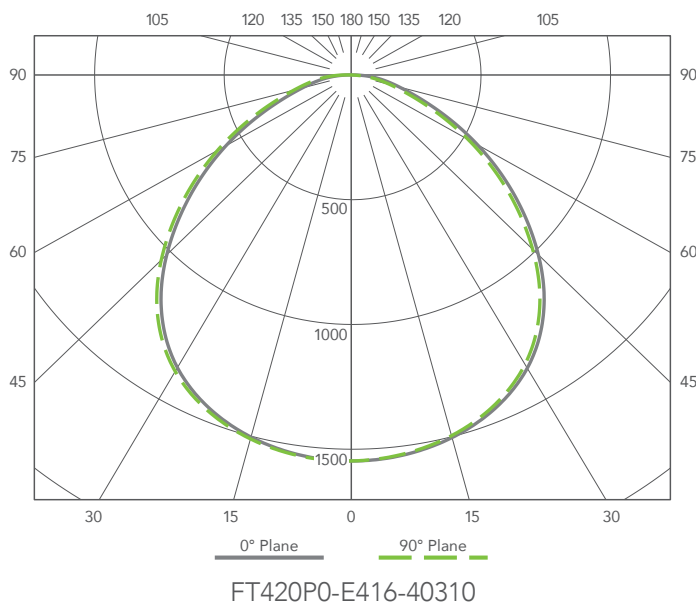

Disclaimer:

toggled reserves the right to make changes in specifications and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.