

LED Shop Light Fixtures

- 120 VAC
- 4 ft. Shop Light includes two (2) LED direct wire tubes
- 5 ft. power cord
- No ballast, includes direct wire LED tubes
- Total output up to 6,200 lumens

toggled LED shop light fixtures do not use ballasts which reduces energy consumption. Provides ideal illumination in both residential (garages, workshops, pantries and basements) and light industrial/commercial applications.

Toggled fixtures are designed to be compatible with any toggled LED direct wire tube.

Outstanding Product Performance

- Up to 60% energy savings
- Eliminates ballasts and maintenance costs
- Operating temperature -20 to 45° C

Superior Quality of Light

- Consistent color rendering, 80 CRI minimum
- UL listed



Commercial-grade

- All metal construction
- Durable white powder-coated finish
- Includes hanging chains
- Reliable start in cold temperatures
- Customizable color temperatures (3000K, 4000K, 5000K, 6500K, and gro)
- Total output up to 6,200 lumens

Top sellers:

- FH420DE-E416-40310 (4,200 lumens using just 32 watts)
- FH420DE-A423-50230 (6,200 lumens using 46 watts)



LED Shop Light Fixtures


White Light Tube Options with Fixtures

Model No.	Length	Input Voltage	Total Power (Watts)	Total Lumens	Efficacy	CRI	CCT	PF
FH420DE-E416-30310	4 feet	120-277 VAC	32	4,200	131	≥80	3000K	>0.9
FH420DE-E416-40310	4 feet	120-277 VAC	32	4,200	131	≥80	4000K	>0.9
FH420DE-E416-50310	4 feet	120-277 VAC	32	4,200	131	≥80	5000K	>0.9
FH420DE-E416-65310	4 feet	120-277 VAC	32	4,200	131	≥80	6500K	>0.9
FH420DE-A423-40230	4 feet	120-277 VAC	46	6,200	135	≥80	4000K	>0.9
FH420DE-A423-50230	4 feet	120-277 VAC	46	6,200	135	≥80	5000K	>0.9

toggled gro Tube Options with Fixtures

Model No.	Length	Input Voltage	Power (Watts)	PPF (400-700nm)	PBAR (350-800nm)	PPF Efficacy (400-700nm)	PBAR Efficacy (350-800nm)
FH420DE-E416-G1310	4 feet	120-277 VAC	32	29.84 umol/Sec.	34.12 umol/Sec.	1.8 umol/Sec/W	2.1 umol/Sec/W
FH420DE-E416-G2310	4 feet	120-277 VAC	32	31.33 umol/Sec.	33.39 umol/Sec.	1.9 umol/Sec./W	2.1 umol/Sec./W

Dimensions

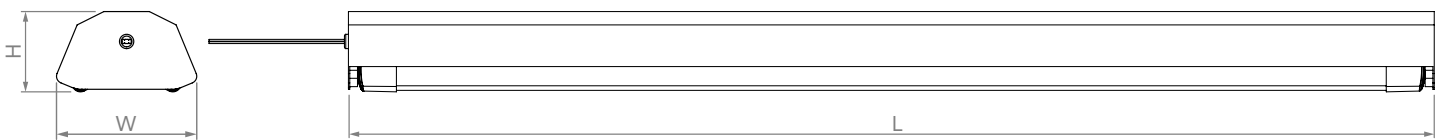

Fixture Model No.	Length	Width	Height	Cord Length
FH420DE	48.1in (1222mm)	4.6in (117.3mm)	2.6in (67.1mm)	5 feet

Disclaimer: toggled reserves the right to make changes to specific items and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.