

LED Vapor Tight Direct Wire Fixtures

- Universal voltage (120-277 VAC)
- 4 ft. Vapor Tight includes two (2) LED direct wire tubes
- No ballast
- Total output up to 6,200 lumens



Toggled direct-wire LED fixtures are an ideal complement or full replacement for existing fluorescent T8/T12 fixtures. Every fixture uses direct-wire technology so there's no additional wiring set-up required. Offering a wide assortment of tube color temperature options (3000K to 6500K) as well as easy tube replacement at an LEDs lifespan ending, Toggled fixtures are designed to last well into the future.

Toggled direct-wire LED fixtures do not use fluorescent ballasts. This allows for both energy savings as a result of no longer having to constantly power ballast(s) as well as cost savings from not requiring future ballast replacements as well as their associated maintenance costs.

Toggled fixtures are compatible with the entire Toggled LED tube product line.

Toggled Vapor Tight fixtures are ideal for parking and home garages, workshops, cold storage and food processing facilities, dusty and wet environments and indoor equestrian facilities. Toggled fixtures are designed to be compatible with any Toggled LED direct wire tube.

Outstanding Product Performance

- Up to 70% energy savings
- Eliminates ballasts and maintenance costs
- Operating temperature -20 to 45° C
- IP65 waterproof, dust proof and weather proof

Superior Quality of Light

- Consistent color rendering, 80 CRI minimum
- UL classified and FCC compliant

Commercial-grade

- Housing: 100% UV stabilized polycarbonate, silicon perimeter gasket
- Gear tray: Flat, heavy gauge die-formed C.R.S. to contain all components
- Knockout: 3/4" conduit at single end
- Reliable start in cold temperatures
- Customizable color temperatures (3000K, 4000K, 5000K, 6500K, and Gro)
- Total output up to 6,200 lumens




LED Vapor Tight Direct Wire Fixtures

Tube Options with Fixtures

Model No.	Length	Input Voltage	Total Power (Watts)	Total Lumens	Efficacy	CRI	CCT	PF
FV420PO-E416-30310	4 feet	120-277 VAC	32	4,200	131	≥80	3000K	>0.9
FV420PO-E416-40310	4 feet	120-277 VAC	32	4,200	131	≥80	4000K	>0.9
FV420PO-E416-50310	4 feet	120-277 VAC	32	4,200	131	≥80	5000K	>0.9
FV420PO-E416-65310	4 feet	120-277 VAC	32	4,200	131	≥80	6500K	>0.9
FV420PO-A423-40230	4 feet	120-277 VAC	46	6,200	135	≥80	4000K	>0.9
FV420PO-A423-50230	4 feet	120-277 VAC	46	6,200	135	≥80	5000K	>0.9

Dimensions

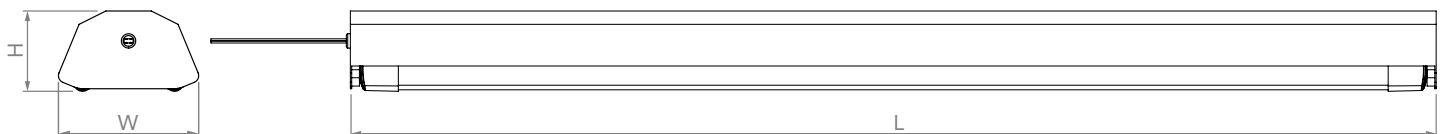

Fixture Model No.	Length	Width	Height
FV420PO	50in (1270mm)	5.5in (139.7mm)	3.875in (98.425mm)

Disclaimer: Toggled reserves the right to make changes to specific items and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.