


High Bay LED Fixtures

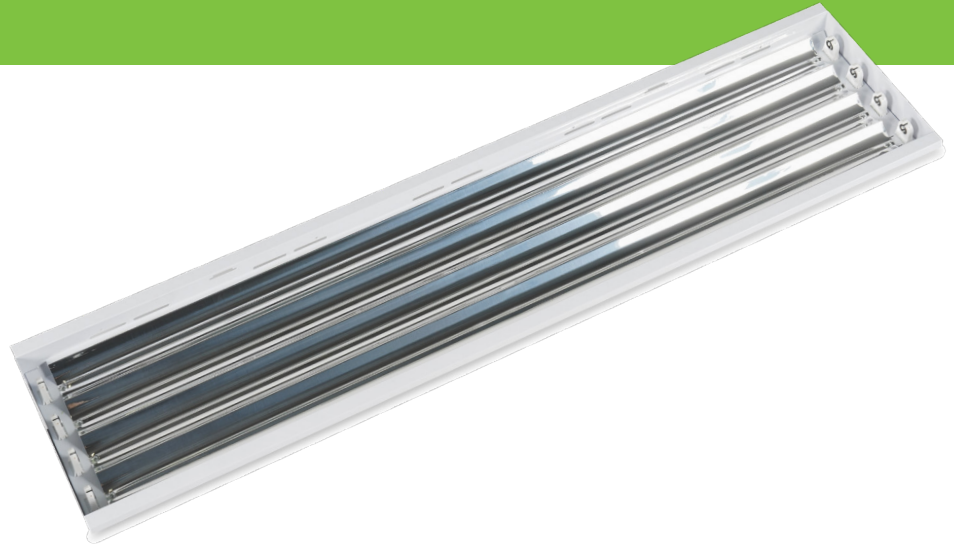

- Universal voltage (120-277 VAC)
- 4, 6, and 8-lamp models
- No ballast, includes direct wire LED tubes
- 50,000 hour lifetime
- Total output up to 32,000 lumens

Toggled® direct-wire LED fixtures are an ideal complement or full replacement for existing fluorescent T8/T12 fixtures. Every fixture uses direct-wire technology so there's no additional wiring set-up required. Offering a wide assortment of tube color temperature options (3000K to 6500K) as well as easy tube replacement, Toggled fixtures are designed to last well into the future.

Toggled direct wire LED fixtures do not use fluorescent ballasts. This allows for both energy savings as a result of no longer having to constantly power ballast(s) as well as cost savings from not requiring future ballast replacements as well as their associated maintenance costs.

Toggled fixtures are compatible with the entire Toggled LED tube product line.

High Bay LED fixtures are designed for suspended lighting needs. Ideal for mounting heights of up to 24 feet.

Outstanding Product Performance

- Up to 70% energy savings
- Eliminates ballasts and maintenance costs
- Designed for direct connection to building AC power, voltage 120-277 VAC
- Operating temperature -20 to 45°C

Superior Quality of Light

- Consistent color rendering, 80 CRI minimum
- UL listed

Commercial-Grade

- Reliable start during cold temperatures
- All metal construction
- Durable white powder-coated finish

Accessories

- Cable hanging kits, power cord, power whip, wire guard and clear acrylic lens

Ordering Information


Fixture	Type	Length	# Lamps	Style	Lens	Wire Termination	Tube Model #
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
F = Fixture	H = Highbay	4 = 4 feet	4 = 4 lamps 6 = 6 lamps 8 = 8 lamps	0 = Standard	D = None P = Prismatic W = Wireguard	0 = None E = 6 ft. cord with 5-15 straight plug 6 = 6 ft. cord with stripped wire	See Specifications



Specifications (High Bay LED fixtures)

	Model No.	Length	Input Voltage	Total Power (Watts)	Total Lumens	Efficacy	CRI	CCT	PF
4 lamp	FH440D0-E416-30310	4 feet	120-277 VAC	64	8400	131	≥80	3000K	≥0.9
	FH440D0-E416-40310	4 feet	120-277 VAC	64	8400	131	≥80	4000K	≥0.9
	FH440D0-E416-50310	4 feet	120-277 VAC	64	8400	131	≥80	5000K	≥0.9
	FH440D0-E416-65310	4 feet	120-277 VAC	64	8400	131	≥80	6500K	≥0.9
	FH440D0-E425-40320	4 feet	120-277 VAC	100	16000	160	≥80	4000K	≥0.9
	FH440D0-E425-50320	4 feet	120-277 VAC	100	16000	160	≥80	5000K	≥0.9
	FH440D0-E425-65320	4 feet	120-277 VAC	100	16000	160	≥80	6500K	≥0.9
6 lamp	FH460D0-E416-30310	4 feet	120-277 VAC	96	12600	131	≥80	3000K	≥0.9
	FH460D0-E416-40310	4 feet	120-277 VAC	96	12600	131	≥80	4000K	≥0.9
	FH460D0-E416-50310	4 feet	120-277 VAC	96	12600	131	≥80	5000K	≥0.9
	FH460D0-E416-65310	4 feet	120-277 VAC	96	12600	131	≥80	6500K	≥0.9
	FH4460D0-E425-40320	4 feet	120-277 VAC	150	24000	160	≥80	4000K	≥0.9
	FH4460D0-E425-50320	4 feet	120-277 VAC	150	24000	160	≥80	5000K	≥0.9
	FH4460D0-E425-65320	4 feet	120-277 VAC	150	24000	160	≥80	6500K	≥0.9
8 lamp	FH480D0-E416-30310	4 feet	120-277 VAC	128	16800	131	≥80	3000K	≥0.9
	FH480D0-E416-40310	4 feet	120-277 VAC	128	16800	131	≥80	4000K	≥0.9
	FH480D0-E416-50310	4 feet	120-277 VAC	128	16800	131	≥80	5000K	≥0.9
	FH480D0-E416-65310	4 feet	120-277 VAC	128	16800	131	≥80	6500K	≥0.9
	FH480D0-E425-40320	4 feet	120-277 VAC	200	32000	160	≥80	4000K	≥0.9
	FH480D0-E425-50320	4 feet	120-277 VAC	200	32000	160	≥80	5000K	≥0.9
	FH480D0-E425-65320	4 feet	120-277 VAC	200	32000	160	≥80	6500K	≥0.9

Dimensions

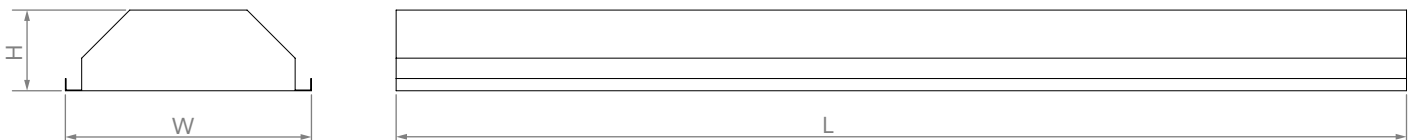

Fixture Model No.	Length	Width	Height
FH440D0	48.6in (1235mm)	11.8in (300mm)	3.9in (98mm)
FH460D0	48.6in (1235mm)	16.5in (420mm)	3.9in (98mm)
FH480D0	48.6in (1235mm)	21.3in (540mm)	3.9in (98mm)

Disclaimer: Toggled reserves the right to make changes to specific items and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.