

LED Vaportight Direct Wire Fixtures

- Universal voltage (120-277 VAC)
- 4 ft. Vaportight includes two (2) LED direct wire tubes
- No ballast
- Total output up to 8,000 lumens



Toggled® direct wire LED fixtures are an ideal complement or full replacement for existing fluorescent T8/T12 fixtures. Every fixture uses direct wire technology so there's no additional wiring set-up required. Offering a wide assortment of tube color temperature options (3000K to 6500K) as well as easy tube replacement at an LEDs lifespan ending, Toggled fixtures are designed to last well into the future.

Toggled direct wire LED fixtures do not use fluorescent ballasts. This allows for both energy savings as a result of no longer having to constantly power ballast(s) as well as cost savings from not requiring future ballast replacements as well as their associated maintenance costs.

Toggled fixtures are compatible with the entire Toggled LED tube product line.

Toggled vaportight fixtures are ideal for parking and home garages, workshops, cold storage and food processing facilities, dusty and wet environments and indoor equestrian facilities. Toggled fixtures are designed to be compatible with any Toggled LED direct wire tube.

Outstanding Product Performance

- Up to 70% energy savings
- Eliminates ballasts and maintenance costs
- Operating temperature -20 to 45° C
- IP65 waterproof, dust proof and weather proof

Superior Quality of Light

- Consistent color rendering, 80 CRI minimum
- UL classified and FCC compliant

Commercial-Grade

- Housing: 100% UV stabilized polycarbonate, silicon perimeter gasket
- Gear tray: Flat, heavy gauge die-formed C.R.S. to contain all components
- Knockout: 3/4" conduit at single end
- Reliable start in cold temperatures
- Customizable color temperatures (3000K, 4000K, 5000K, 6500K, and Gro)




LED Vaportight Direct Wire Fixtures

Tube options with fixtures

| Model No. | Length | Input Voltage | Total Power (Watts) | Total Lumens | Efficacy | CRI | CCT | PF |
|--------------------|--------|---------------|---------------------|--------------|----------|-----|-------|------|
| FV420PO-E416-30310 | 4 feet | 120-277 VAC | 32 | 4,200 | 131 | ≥80 | 3000K | >0.9 |
| FV420PO-E416-40310 | 4 feet | 120-277 VAC | 32 | 4,200 | 131 | ≥80 | 4000K | >0.9 |
| FV420PO-E416-50310 | 4 feet | 120-277 VAC | 32 | 4,200 | 131 | ≥80 | 5000K | >0.9 |
| FV420PO-E416-65310 | 4 feet | 120-277 VAC | 32 | 4,200 | 131 | ≥80 | 6500K | >0.9 |
| FV420P0-E425-40320 | 4 feet | 120-277 VAC | 50 | 8,000 | 160 | ≥80 | 4000K | >0.9 |
| FV420P0-E425-50320 | 4 feet | 120-277 VAC | 50 | 8,000 | 160 | ≥80 | 5000K | >0.9 |
| FV420P0-E425-65320 | 4 feet | 120-277 VAC | 50 | 8,000 | 160 | ≥80 | 6500K | >0.9 |

Dimensions

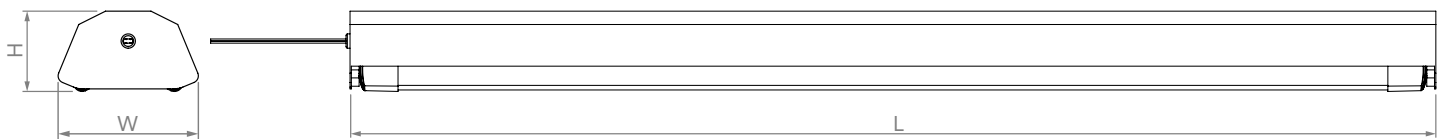

| Fixture Model No. | Length | Width | Height |
|-------------------|---------------|-----------------|--------------------|
| FV420PO | 50in (1270mm) | 5.5in (139.7mm) | 3.875in (98.425mm) |

Disclaimer: Toggled reserves the right to make changes to specific items and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.