

# Strip LED Fixtures (2-Lamp Models)

- Universal voltage (120-277 VAC)
- 2, 3, and 4 foot models
- No ballast, includes direct wire LED tubes
- 50,000 hour lifetime



Toggled® direct wire LED fixtures are an ideal complement or full replacement for existing fluorescent T8/T12 fixtures. Every fixture uses direct wire technology so there's no additional wiring set-up required. Offering a wide assortment of tube color temperature options (3000K to 6500K) as well as easy tube replacement at an LEDs lifespan ending, Toggled fixtures are designed to last well into the future.

Toggled direct wire LED fixtures do not use fluorescent ballasts. This allows for both energy savings as a result of no longer having to constantly power ballast(s) as well as cost savings from not requiring future ballast replacements as well as their associated maintenance costs.

Toggled fixtures are compatible with the entire Toggled LED tube product line.

### Outstanding Product Performance

- Provides up to 70% energy savings
- Eliminates ballasts and maintenance costs
- Designed for direct connection to building AC power, voltage 120-277 VAC
- Operating temperature -20 to 45° C

### Superior Quality of Light

- Consistent color rendering, 80 CRI minimum
- UL listed

### Commercial-Grade

- Reliable start during cold temperatures
- All metal construction
- Durable white powder-coated finish

## Ordering Information

Fixture	Type	Length	# Lamps	Style	Lens	Wire Termination	Tube Model #
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
F = Fixture	S = Strip/ Surface	2 = 2 feet 3 = 3 feet 4 = 4 feet	1 = 1 lamp 2 = 2 lamps	0 = Standard	D = None	0 = None	See Specifications




# Strip LED Fixtures (2-Lamp Models)

## Specifications

	Model No.	Length	Input Voltage	Total Power (Watts)	Total Lumens	Efficacy	CRI	CCT	PF
4 feet	FS420D0-E416-30310	4 feet	120-277 VAC	32	4,200	131	≥80	3000K	>0.9
	FS420D0-E416-40310	4 feet	120-277 VAC	32	4,200	131	≥80	4000K	>0.9
	FS420D0-E416-50310	4 feet	120-277 VAC	32	4,200	131	≥80	5000K	>0.9
	FS420D0-E416-65310	4 feet	120-277 VAC	32	4,200	131	≥80	6500K	>0.9
	FS420D0-E425-40320	4 feet	120-277 VAC	50	8,000	160	≥80	4000K	>0.9
	FS420D0-E425-50320	4 feet	120-277 VAC	50	8,000	160	≥80	5000K	>0.9
	FS420D0-E425-65320	4 feet	120-277 VAC	50	8,000	160	≥80	6500K	>0.9
3 feet	FS320D0-E312-30310	3 feet	120-277 VAC	24	3,360	140	≥80	3000K	>0.9
	FS320D0-E312-40310	3 feet	120-277 VAC	24	3,360	140	≥80	4000K	>0.9
	FS320D0-E312-50310	3 feet	120-277 VAC	24	3,360	140	≥80	5000K	>0.9
	FS320D0-E312-65310	3 feet	120-277 VAC	24	3,360	140	≥80	6500K	>0.9
2 feet	FS220D0-E208-30310	2 feet	120-277 VAC	16	2,240	140	≥80	3000K	>0.9
	FS220D0-E208-40310	2 feet	120-277 VAC	16	2,240	140	≥80	4000K	>0.9
	FS220D0-E208-50310	2 feet	120-277 VAC	16	2,240	140	≥80	5000K	>0.9
	FS220D0-E208-65310	2 feet	120-277 VAC	16	2,240	140	≥80	6500K	>0.9
	FS220D0-E213-40320	2 feet	120-277 VAC	25	4,000	140	≥80	4000K	>0.9
	FS220D0-E213-50320	2 feet	120-277 VAC	25	4,000	140	≥80	5000K	>0.9
	FS220D0-E213-65320	2 feet	120-277 VAC	25	4,000	140	≥80	6500K	>0.9

## Dimensions

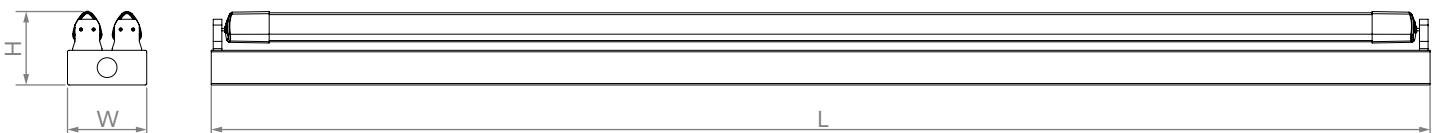

Fixture Model No.	Length	Width	Height
FS420D0	48.5in (1231mm)	3.1in (80mm)	2.9in (74mm)
FS320D0	36.5in (928mm)	3.1in (80mm)	2.9in (74mm)
FS220D0	24.4in (621mm)	3.1in (80mm)	2.9in (74mm)

**Disclaimer:** Toggled reserves the right to make changes to specific items and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.